





Ultrasonic Sensors



Nominal sensing distance



Until 300 mm




From 300 to 900 mm



From 900 to 1,600 mm



From 1,600 to 3,500 mm



Over 3,500 mm






Ultrasonic Sensor

Basic theory



Operation principle of ultrasonic sensor

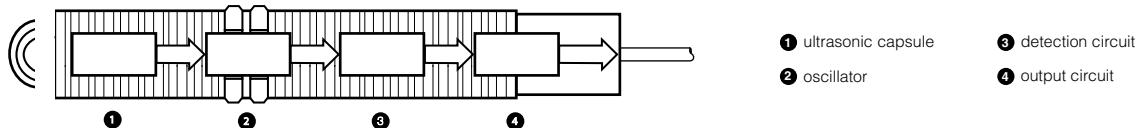


Ultrasonic sensors are composed by: ultrasonic transducer, oscillator, trigger circuit and output circuit. There are three working principles:

- **direct diffusion**

Ultrasonic transducer is energized by high voltage pulses and starts to emit an ultrasonic signal. The ultrasonic signal is reflected by the target towards the sensor. Trigger circuit measures the time between the emission and the detection of the signal. Since the speed of the ultrasonic beam in air is known, it is easy to have not only an indication of the presence of the target, but also a measure of the distance between sensor and target.

In diffuse models, the ultrasonic transducer works before as emitter and then as receiver. When it is in "emission mode" no signal can be detected. This imply that in front of the sensor there is a blind zone where the detection of objects is not possible or not reliable.

The dimension of the blind zone depends on the type of ultrasonic transducer used.

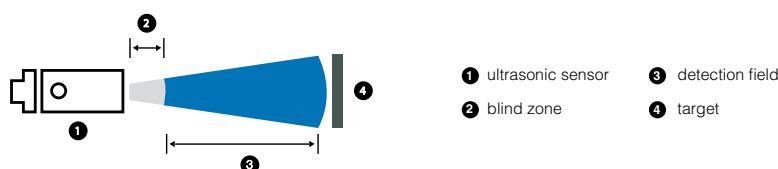

- **retroreflection**

To work correctly, it is necessary a background/reflector (any flat, orthogonal, fixed part). The sensor measures the distance between sensor and reflector. Any changes in this measure means that there is an object between sensor and reflector. In this case we don't have a blind zone, but we have to consider a minimum sensing distance between sensor and reflector: the object can be detected in the whole working area.

- **emitter and receiver**

There are two separate units: emitter and receiver. The receiver detects the signal from the emitter. If there is no signal, this means that there is an object between emitter and receiver.

Considerations on targets tipology

Ultrasonic sensor can detect any kind of targets (more or less). The effective detection distance depends on: target dimensions (more the target is big, more ultrasonic signal is reflected, higher the sensing distance that it is possible to reach), materials (compact targets, as metal, wood, liquids, reflect a lot of the ultrasonic signal – low density materials, as powders, foams, absorb the majority of the ultrasonic beam). Sound absorbing materials can be detected only at very low distance.

In the direct diffuse sensors, other factors have to be considered:

- **shape of the object**

If the objects are perpendicular to the ultrasonic beam, the beam is reflected towards the sensor, and so the object is well detected. Objects with irregular or tilted shape, scatters the beam, so it is possible that they would not be detected.

- **object temperature**

Even if MD sensors are fully thermically compensated in the whole sensing range, a high thermal gradient between object and environment, can create turbulent air whirlpool that can distort the ultrasonic beam.


All the measures indicate in the catalogue are related to the standard target according EN60947-5-2. Users have to take care of the possible differences with real target used.

Switching frequency

Switching frequency is the maximum output switching frequency performed by the output circuit when standard targets cross the sensing field. It is depending on: sensor's characteristics, target dimensions and size, distance from the targets.

Hysteresis

Hysteresis is the difference between switch on and switch off position. It is necessary to avoid output oscillations if the target is vibrating or fixed close to the switching point.

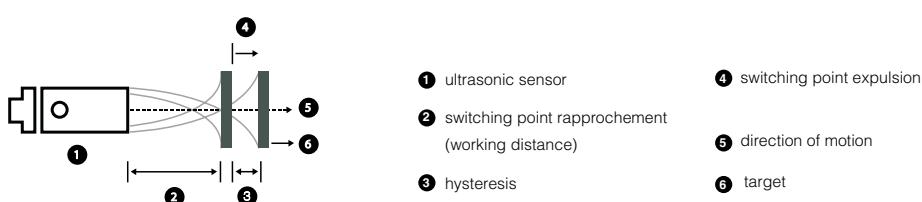



			working distance (mm)													
function	dimension	material	40...300	50...400	60...800	100...900	80 ... 1,200	200 ... 1,500	150 ... 1,600	200 ... 2,200	250 ... 3,500	350 ... 3,500	350 ... 6,000	600 ... 6,000	pag.	
			UK6A	UK6C	UK6D	UK6D	UK1A	UK1C	UK1D	UK1F	UK1D	UK1F	UT1B	UT1B		
direct diffuse	M18 short housing	plastic	UK6A		UK6C		UK6D									511
		AISI316L	UK6A		UK6C		UK6D									511
	M18 with Teach-In	plastic		UK1A		UK1C			UK1D	UK1F						501
	M18 with Teach-In 90°			UK1A					UK1D	UK1F						501
	M18 with Teach-In	AISI316L		UK1A		UK1C		UK1D								501
	M30	plastic											UT1B			519
		AISI316L											UT1B			519
	M30 large front	plastic													UT2F	519
	compact cubic														QU6	531

			working distance (mm)													
function	dimension	material	0...300	50...300	100...400	80...800	150...900	0...1,100	100 ... 1,200	250 ... 1,600	300 ... 2,200	250 ... 3,500	350 ... 3,500	350 ... 6,000	pag.	
			UKR6A	UKR6C	UKR1A	UKR1C	UKR6D	UKR1D	UKR1F	UTR1B	UTR2F					
retro reflective	M18 corpo corto	plastic														511
	M18 with Teach-In															501
	M30															519
	M30 large front															519
emitter/receiver	cubic		UHZ													527
								UHS								527

function	dimension	material	page
fork	fork for labels	metallic	535



UK1 and UKR1 series

M18 cylindrical direct diffuse & retro-reflective
Ultrasonic Sensor UK1 with Teach-In button



features

- Models with digital programmable output
- Models with current or voltage analogue outputs
- Adjustable Hysteresis function: model with programmable double digital outputs, specific for levels
- Working area adjusting (window teach or single point teach) by Teach-in button suitable for all models for a fast coming into work
- Multifunction LED indicator: output type, adjustment procedure, NO/NC selection and reverse analog output slope

web contents

- Application notes
- Photos
- Catalogue / Manuals



code description (*)

	UK	1	A	/	E	1	-	0	E	UL	AN
series	UK	M18 Ultrasonic Sensor									
function	R	Direct diffuse models									
housing type	R	Retroreflective models									
nominal sensing distance Sn	1	Standard housing									
adjustment	A	50 - 400 mm									
	C	100 - 900 mm									
	D	150 - 1,600 mm (plastic models) / 200 - 1,500 mm (metallic models)									
	F	200 - 2,200 mm									
output	E	Adjustment by Teach-In button									
	1	0...10 V single voltage analogue output									
	2	4...20 mA single current analogue output									
	4	NPN - NO/NC digital output + 4 ... 20 mA current analogue output									
	6	PNP - NO/NC digital output + 4 ... 20 mA current analogue output									
	7	PNP - NO/NC digital output + 0 ... 10 V voltage analogue output									
	9	NPN - NO/NC digital output + 0 ... 10 V voltage analogue output									
	N	NPN - NO/NC single digital output									
	P	PNP - NO/NC single digital output									
	W	PNP - two digital outputs with standard window and adjustable hysteresis functions									
	M	NPN - two digital outputs with standard window and adjustable hysteresis functions									
housing materials	0	Plastic housing									
	1	AISI 316L (DIN 1.4404) stainless steel housing (axial)									
	2	90° emission, plastic housing									
cable exit / connector	A	Axial cable exit (2 m)									
	E	M12 plug cable exit									
cULus	UL	With cULus certification									
ATEX	AN	ATEX certified, Cat.3 2.22 Zone									

(*) Multiplexing models and with synchronization available.



available models

single digital output standard cULus certified available models

housing	distance (mm)	output	analogue output 0...10 V	analogue output 4...20 mA	1 x PNP - NO/NC	1 x NPN - NO/NC
plastic	50...400	M12 connector	UK1A/E1-0EUL	UK1A/E2-0EUL	UK1A/EP-0EUL	UK1A/EN-0EUL
	100...900		UK1C/E1-0EUL	UK1C/E2-0EUL	UK1C/EP-0EUL	UK1C/EN-0EUL
	150...1,600		UK1D/E1-0EUL	UK1D/E2-0EUL	UK1D/EP-0EUL	UK1D/EN-0EUL
	200...2,200		UK1F/E1-0EUL	UK1F/E2-0EUL	UK1F/EP-0EUL	UK1F/EN-0EUL
	50...400	cable	UK1A/E1-0AUL	UK1A/E2-0AUL	UK1A/EP-0AUL	UK1A/EN-0AUL
	100...900		UK1C/E1-0AUL	UK1C/E2-0AUL	UK1C/EP-0AUL	UK1C/EN-0AUL
	150...1,600		UK1D/E1-0AUL	UK1D/E2-0AUL	UK1D/EP-0AUL	UK1D/EN-0AUL
	200...2,200		UK1F/E1-0AUL	UK1F/E2-0AUL	UK1F/EP-0AUL	UK1F/EN-0AUL

available models

double digital output standard cULus certified available models

housing	distance (mm)	output	2 x PNP - NO/NC	2 x NPN - NO/NC
plastic	50...400	M12 connector	UK1A/EW-0EUL	UK1A/EM-0EUL
	100...900		UK1C/EW-0EUL	UK1C/EM-0EUL
	150...1,600		UK1D/EW-0EUL	UK1D/EM-0EUL
	200...2,200		UK1F/EW-0EUL	UK1F/EM-0EUL
	50...400	cable	UK1A/EW-0AUL	UK1A/EM-0AUL
	100...900		UK1C/EW-0AUL	UK1C/EM-0AUL
	150...1,600		UK1D/EW-0AUL	UK1D/EM-0AUL
	200...2,200		UK1F/EW-0AUL	UK1F/EM-0AUL
stainless steel AISI 316L	50...400	M12 connector	UK1A/EW-1EUL	UK1A/EM-1EUL
	100...900		UK1C/EW-1EUL	UK1C/EM-1EUL
	200...1,500		UK1D/EW-1EUL	UK1D/EM-1EUL
	50...400	cable	UK1A/EW-1AUL	UK1A/EM-1AUL
	100...900		UK1C/EW-1AUL	UK1C/EM-1AUL
	200...1,500		UK1D/EW-1AUL	UK1D/EM-1AUL

available models

analog and digital output cULus certified

housing	distance (mm)	output	1 x PNP - NO/NC + 1 x 4...20 mA	1 x NPN - NO/NC + 1 x 4...20 mA	1 x PNP - NO/NC + 1 x 0...10 V	1 x NPN - NO/NC + 1 x 0...10 V
plastic	50...400	M12 connector	UK1A/E6-0EUL	UK1A/E4-0EUL	UK1A/E7-0EUL	UK1A/E9-0EUL
	100...900		UK1C/E6-0EUL	UK1C/E4-0EUL	UK1C/E7-0EUL	UK1C/E9-0EUL
	150...1,600		UK1D/E6-0EUL	UK1D/E4-0EUL	UK1D/E7-0EUL	UK1D/E9-0EUL
	200...2,200		UK1F/E6-0EUL	UK1F/E4-0EUL	UK1F/E7-0EUL	UK1F/E9-0EUL
	50...400	cable	UK1A/E6-0AUL	UK1A/E4-0AUL	UK1A/E7-0AUL	UK1A/E9-0AUL
	100...900		UK1C/E6-0AUL	UK1C/E4-0AUL	UK1C/E7-0AUL	UK1C/E9-0AUL
	150...1,600		UK1D/E6-0AUL	UK1D/E4-0AUL	UK1D/E7-0AUL	UK1D/E9-0AUL
	200...2,200		UK1F/E6-0AUL	UK1F/E4-0AUL	UK1F/E7-0AUL	UK1F/E9-0AUL
stainless steel AISI 316L	50...400	M12 connector	UK1A/E6-1EUL	UK1A/E4-1EUL	UK1A/E7-1EUL	UK1A/E9-1EUL
	100...900		UK1C/E6-1EUL	UK1C/E4-1EUL	UK1C/E7-1EUL	UK1C/E9-1EUL
	200...1,500		UK1D/E6-1EUL	UK1D/E4-1EUL	UK1D/E7-1EUL	UK1D/E9-1EUL
	50...400	cable	UK1A/E6-1AUL	UK1A/E4-1AUL	UK1A/E7-1AUL	UK1A/E9-1AUL
	100...900		UK1C/E6-1AUL	UK1C/E4-1AUL	UK1C/E7-1AUL	UK1C/E9-1AUL
	200...1,500		UK1D/E6-1AUL	UK1D/E4-1AUL	UK1D/E7-1AUL	UK1D/E9-1AUL

available models

cULus and ATEX certified

housing	distance (mm)	output	analogue output 0...10 V	analogue output 4...20 mA	1 x PNP - NO/NC	1 x NPN - NO/NC + 1 x 4...20 mA	1 x PNP - NO/NC + 1 x 0...10 V
plastico	50...400	M12 connector	UK1A/E1-0EULAN	UK1A/E2-0EULAN	UK1A/EP-0EULAN	UK1A/E6-0EULAN	UK1A/E7-0EULAN
	100...900		UK1C/E1-0EULAN	UK1C/E2-0EULAN	UK1C/EP-0EULAN	UK1C/E6-0EULAN	UK1C/E7-0EULAN
	150...1.600		UK1D/E1-0EULAN	UK1D/E2-0EULAN	UK1D/EP-0EULAN	UK1D/E6-0EULAN	UK1D/E7-0EULAN
	200...2.200		UK1F/E1-0EULAN	UK1F/E2-0EULAN	UK1F/EP-0EULAN	UK1F/E6-0EULAN	UK1F/E7-0EULAN

technical specifications

cULus certified models

	UK1A/E*-*UL	UK1C/E*-*UL	UK1D/E*-*UL	UK1F/E*-*UL
maximum sensing distance	400 mm ⁽¹⁾	900 mm ⁽²⁾	1,600 mm ⁽²⁾ 1,500 mm ⁽²⁾	2,200 mm ⁽²⁾
minimum sensing distance	50 mm	100 mm	150 mm 200 mm	200 mm
sensing range (Sd)	50...400 mm	100...900 mm	150...1,600 mm 200...1,500 mm	200...2,200 mm
beam angle	± 8° / ± 7°	± 7°	± 8° / ± 7°	± 7°
switching frequency (digital output)	10 Hz	4 Hz	2 Hz / 1Hz	1 Hz
response time (digital output)	500 ms	≤125 ms	250 ms / 500 ms	500 ms
hysteresis			1%	
repeatability			0.5%	
resolution	1 mm	2 mm	3 mm	3 mm
linearity error			1%	
temperature range			- 20°C...+ 60°C	
temperature compensation			•	
operating voltage			15 - 30 Vcc	
temperature drift			5%	
ripple			≤ 7%	
leakage current			10 µA @ 30 Vcc	
output voltage drop			2.2 V max. (IL = 100 mA)	
no-load supply current			≤ 50 mA	
output current (digital output)			100 mA ⁽³⁾	
minimum load resistance (analog voltage output)			3 k Ω	
set point adjustment			Teach-In button	
power on delay			≤ 500 ms (digital output) ≤ 900 ms (analogue output)	
power supply protections			polarity reversal, transient	
digital output protections			short circuit (auto reset), overvoltage pulses	
analogue electrical protections			overvoltage pulses	
EMC			conforming to EMC Directive, according to EN 60947-5-2	
protection degree			IP67 (EN60529) ⁽⁴⁾	
housing material			PBT/stainless steel AISI 316L	PBT
active head material			Epoxy-Glass resin	
tightening torque	1	Nm plastic housing / 50 metallic housing		1 Nm
weight			plastic version: 70 g connector / 110 g cable metallic version: 100 g connector / 170 gr cable	
storage temperature			- 35°C...+ 70° without freezing	

(1) Metallic target 100 x 100 mm (2) Metallic target 200 x 200 (3) Available models without cULus certified with output current: 500 mA (models with single or double digital output); 300 mA (models with digital and analog output) (4) Protection guarantee only with plug cable well mounted



available models

retroreflective models

M18 with
Teach-In button

housing	distance (mm)	output	material	PNP - NO/NC	NPN - NO/NC	
M18	100...400	M12	plastic	UKR1A/EP-0EUL	UKR1A/EN-0EUL	
	150...900			UKR1C/EP-0EUL	UKR1C/EN-0EUL	
	250...1,600			UKR1D/EP-0EUL	UKR1D/EN-0EUL	
	300...2,200			UKR1F/EP-0EUL	UKR1F/EN-0EUL	
	100...400	cable		UKR1A/EP-0AUL	UKR1A/EN-0AUL	
	150...900			UKR1C/EP-0AUL	UKR1C/EN-0AUL	
	250...1,600			UKR1D/EP-0AUL	UKR1D/EN-0AUL	
	300...2,200			UKR1F/EP-0AUL	UKR1F/EN-0AUL	

technical specifications

retroreflective models

	UKR1A/E*-*E	UKR1C/E*-*E	UKR1D/E*-*E	UKR1F/E*-*E
nominal sensing distance	400 mm	900 mm	1,600 mm	2,200 mm
reflector minimum sensing distance	100 mm	150 mm	250 mm	300 mm
beam angle	±8°	±7°	± 8°	± 7°
switching frequency	8 Hz	3 Hz	1 Hz	1 Hz
operating voltage	15...30 Vdc			
max. ripple content	5%			
output type	PNP or NPN NO/NC selectable			
output current	100 mA			
output voltage drop	≤ 2.2 V (@ I = 100mA)			
no-load supply current	≤ 50 mA @ Vdc=24V			
leakage current	≤ 10 µA @ 30V			
power on delay	≤ 500 ms			
ambient temperature range	- 20°C...+ 60°C			
temperature drift of Sr	≤ 5 %			
short-circuit protection	● (autoreset)			
induction protection	●			
voltage reversal protection	●			
weight	26 g			
LEDs	yellow: exit			
protection degree	IP67			
EMC	IEC60947-5-2			
housing material	plastic housing PBT			
active head material	glass resin			
connection	M12 plug cable exit			
weight	70 g connector / 100 g cable			

available models

90° emission models

housing	portata (mm)	output	material	PNP - NO/NC 0...10 V	NPN - NO/NC 0...10 V	PNP - NO/NC 4...20 mA	NPN - NO/NC 4...20 mA	2xPNP hysteresis/window	2xNPN hysteresis/window
M18	50...400	M12	plastic	UK1A/E7-2EUL	UK1A/E9-2EUL	UK1A/E6-2EUL	UK1A/E4-2EUL	UK1A/EW-2EUL	UK1A/EM-2EUL
	150...1.600			UK1D/E7-2EUL	UK1D/E9-2EUL	UK1D/E6-2EUL	UK1D/E4-2EUL	UK1D/EW-2EUL	UK1D/EM-2EUL
	200...2.200			UK1F/E7-2EUL	UK1F/E9-2EUL	UK1F/E6-2EUL	UK1F/E4-2EUL	UK1F/EW-2EUL	UK1F/EM-2EUL

technical specifications

90° emission models

	UK1A/E*-2EUL	UK1D/E*-2EUL	UK1F/E*-2EUL
nominal sensing distance	400 mm	1,600 mm	2,200 mm
minimum sensing distance	50 mm	150 mm	200 mm
sensing range	50...400 mm	150...1,600 mm	200...2,200 mm
beam angle	± 8°	± 8°	± 7°
hysteresis		1%	
repeatability		0.5%	
switching frequency	10 Hz	2 Hz	1 Hz
response time		500 ms	
operating voltage		15...30 Vdc	
max. ripple content		7%	
output current		100 mA (digital output)	
output voltage drop		≤ 2.2 V (@ I = 100mA)	
no-load supply current		≤ 50 mA	
leakage current		≤ 10 µA @ 30V	
power on delay		≤ 900 mA	
ambient temperature range		- 20°C...+ 60°C	
temperature drift of Sr		≤ 5%	
short-circuit protection		● (autoreset)	
induction protection		●	
voltage reversal protection		●	
weight	75 g		
LEDs		green: echo - yellow: output	
protection degree		IP67	
housing material		plastic housing: PBT	
active head material		glass reinforced epoxy resin	
connection		M12 plug cable exit	



M18 with
Teach-In button



electrical diagrams of connections

M18 with
Teach-In button

PNP NO/NC + analogue output models	PNP models with double output	PNP NO/NC with single digital output	models with single analogue output
NPN NO/NC + analogue output models	NPN models with double output	NPN NO/NC models with single digital output	

BN brown

BU blue

BK black

WH white

connectors


M12 UK1*/E7 - *E** UK1*/E4 - *E** UK1*/E6 - *E** UK1*/E9 - *E**	M12 UK1*/EM - *E** UK1*/EW - *E**	M12 UK1*/E1 - *E** UK1*/EP - *E** UK1*/E2 - *E** UK1*/EN - *E**

available outputs




M18 with
Teach-In button


models with single digital output

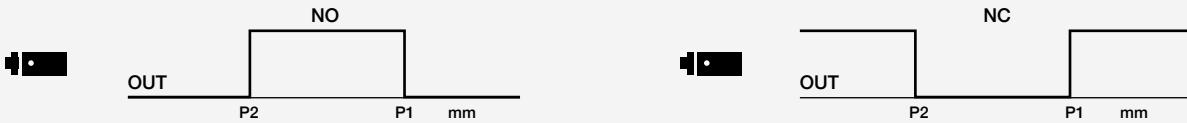

models with single analogue output

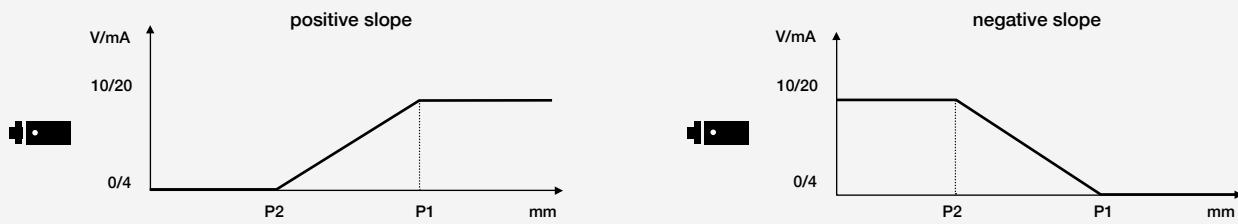

models with double digital output - standard window and adjustable hysteresis outputs

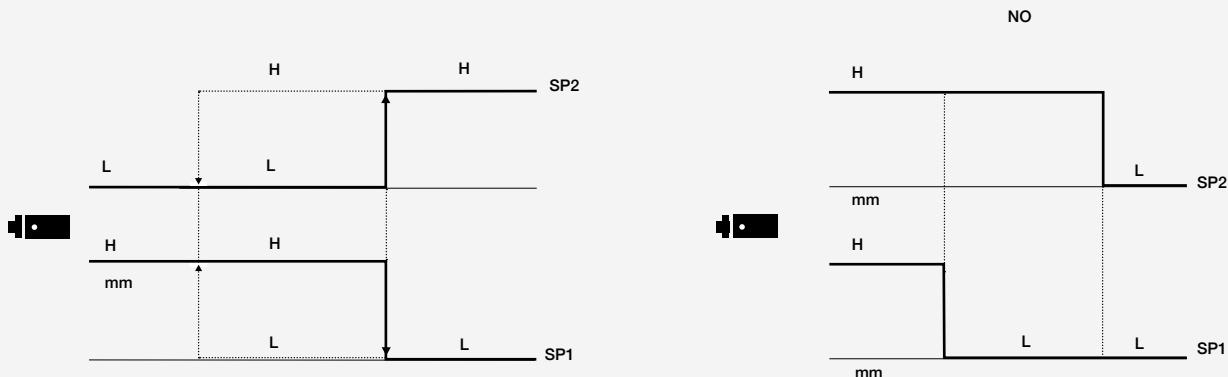

models with digital output + analogue output ⁽¹⁾



⁽¹⁾ It can be used as a single model output

P1 maximum selected working distance and first point to select


P2 minimum selected working distance and second point to select



response diagrams

direct diffuse models

M18 with
Teach-In button

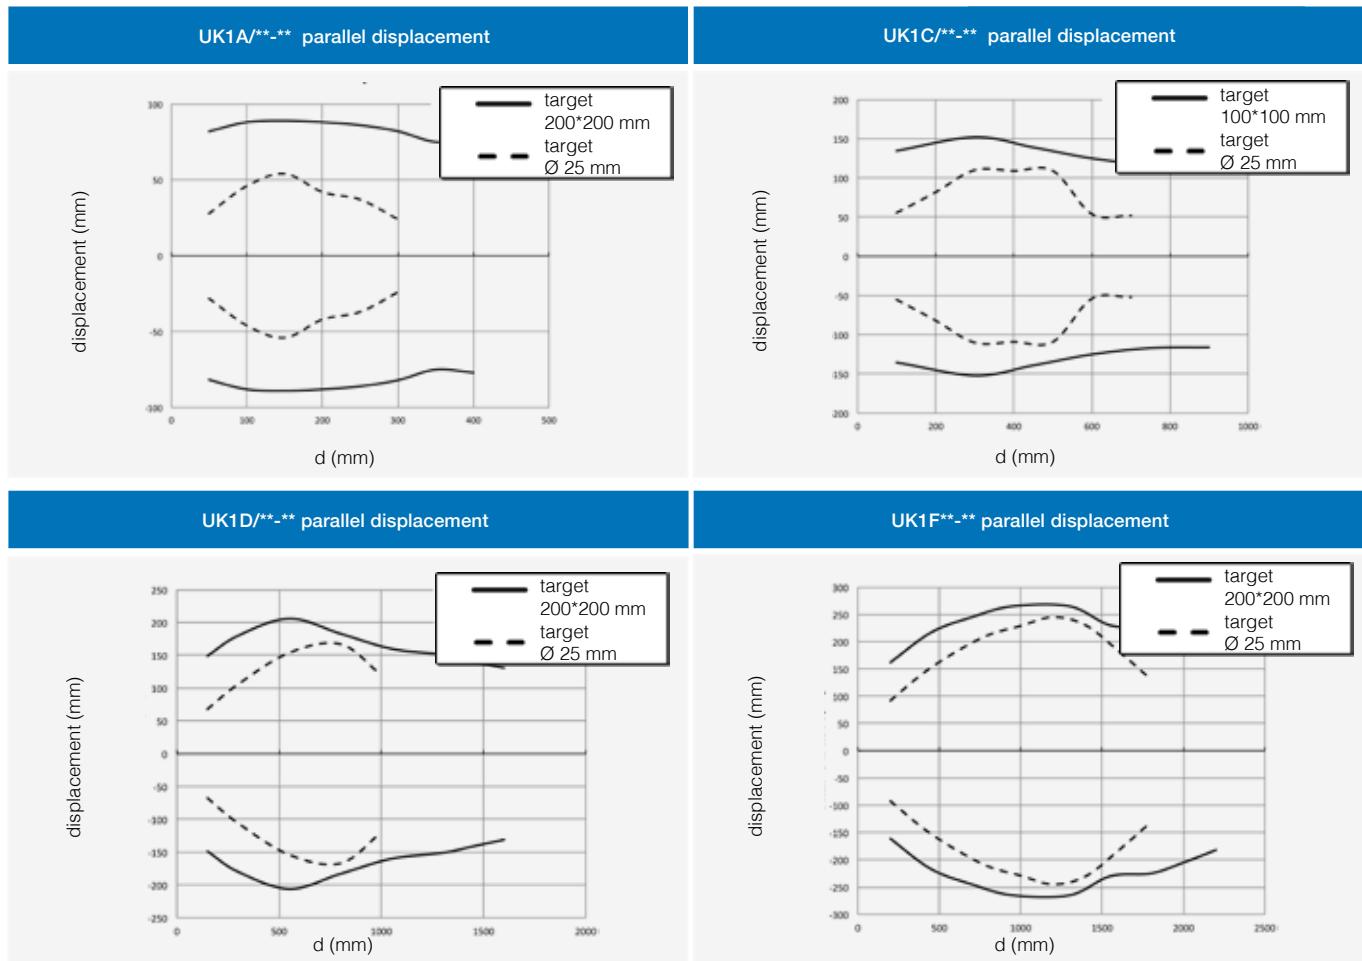


response diagrams

retroreflective models




M18 with
Teach-In button

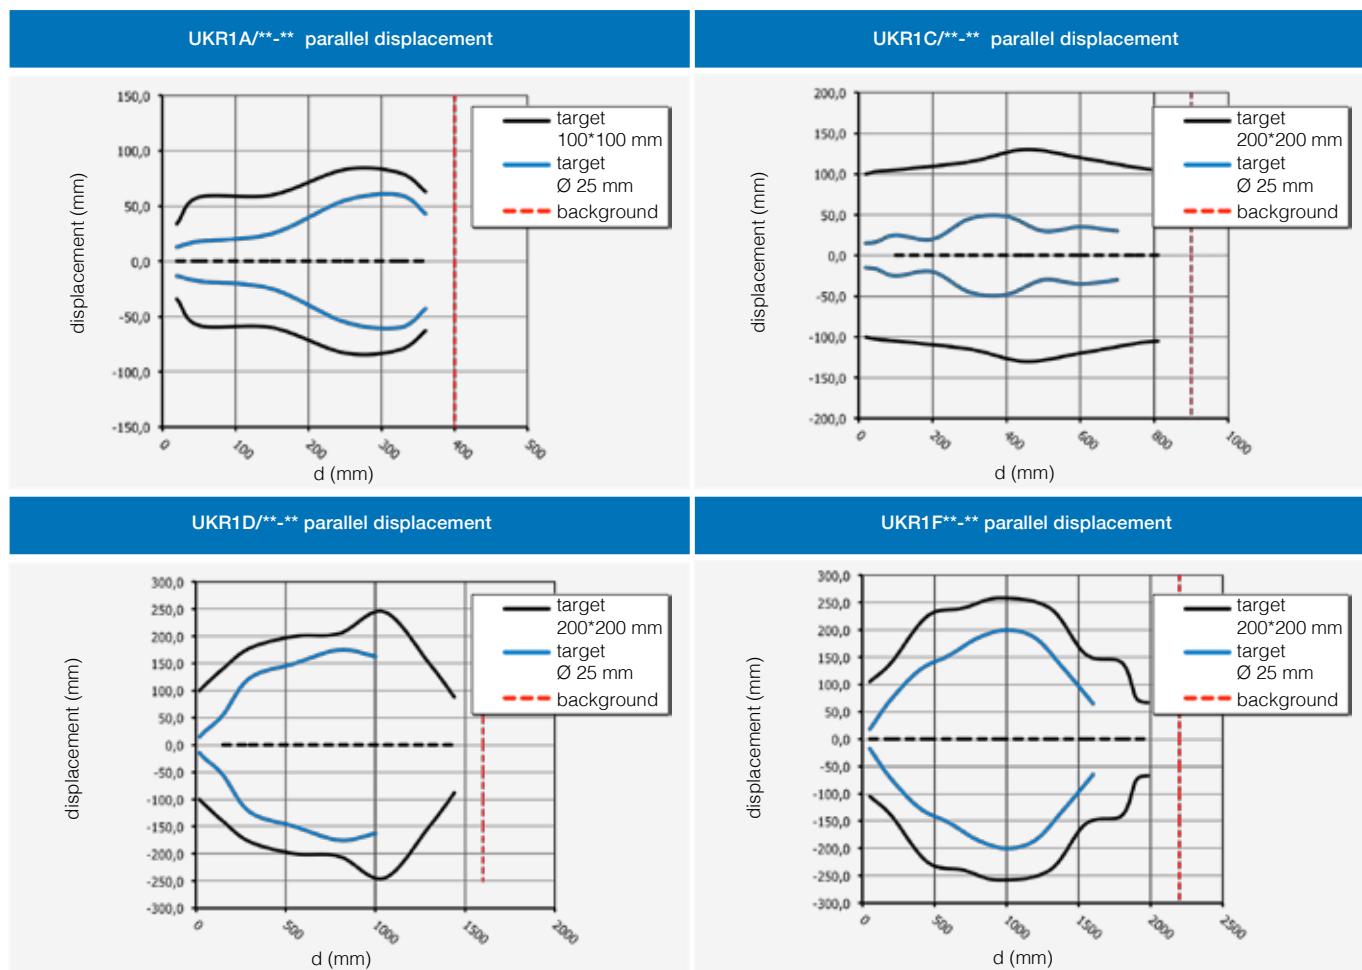

dimensions (mm)

plastic models

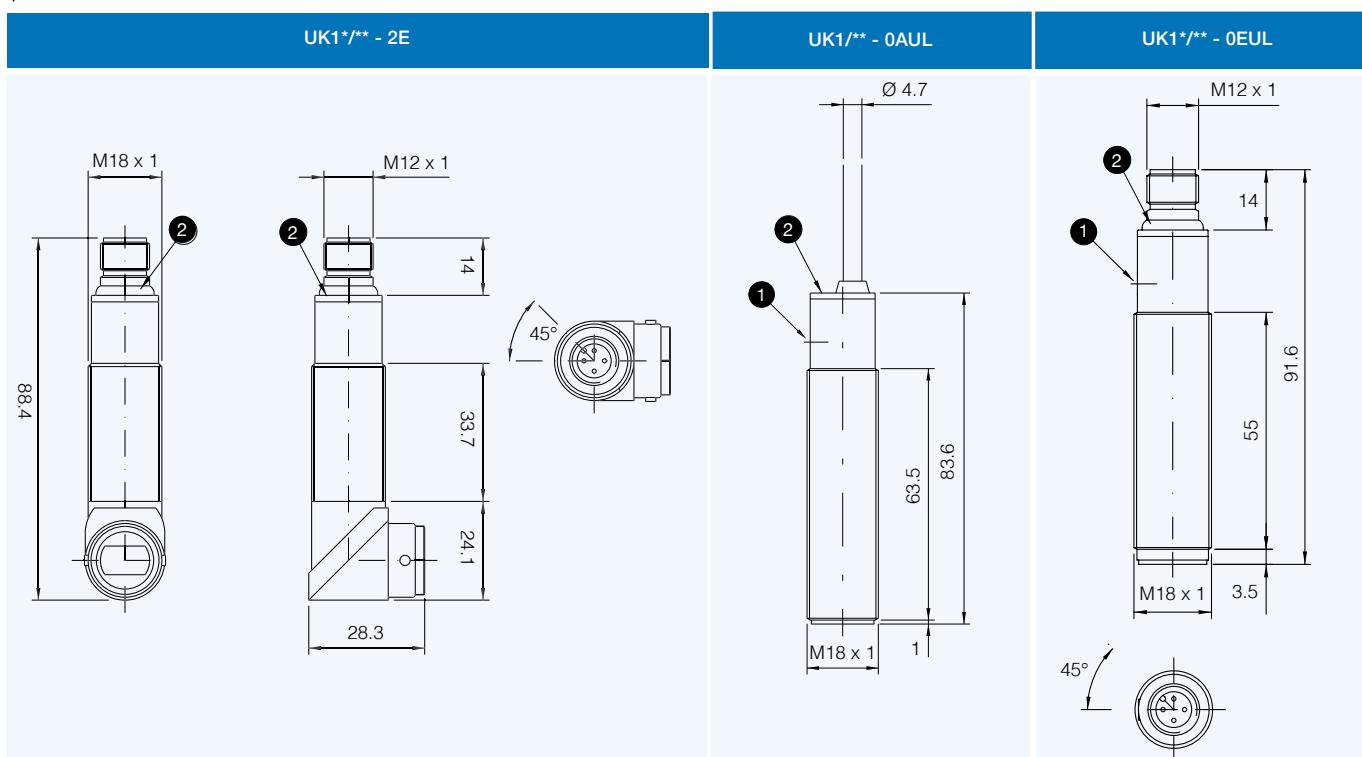

1 Teach-In button


2 LED



dimensions (mm)

accessories included in all plastic models


M18 with
Teach-In button

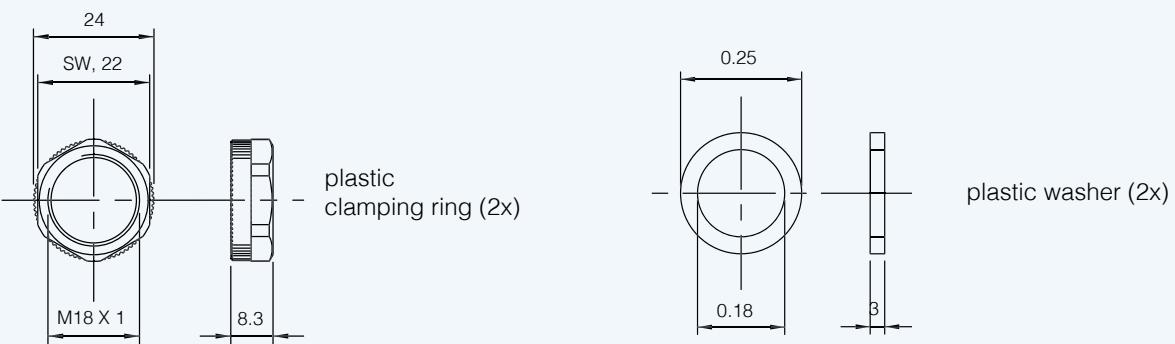


dimensions (mm)

metallic models

UK1** - 1AUL

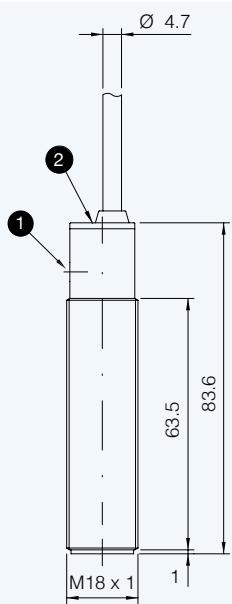

UK1** - 1EUL

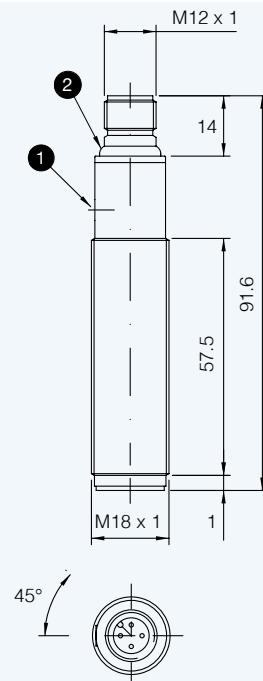


1 Teach-In button

2 LED

dimensions (mm)

accessories included in all metallic models

UK1 - UKR1

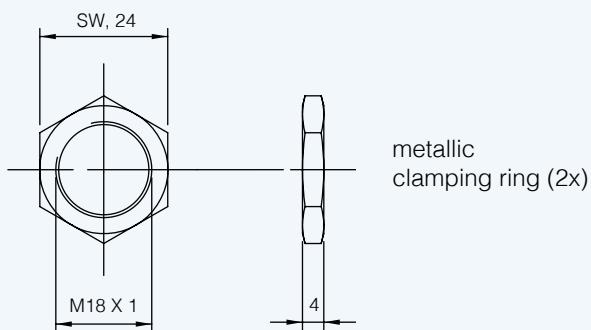



UK6 series

M18 cylindrical short body direct diffuse & retro-reflective Ultrasonic Sensor UK6 with Teach-In button



features

- M18 diffuse sensors with short housing
- Digital output
- Analogue output




web contents



- Application notes
- Photos
- Catalogue / Manuals



code description

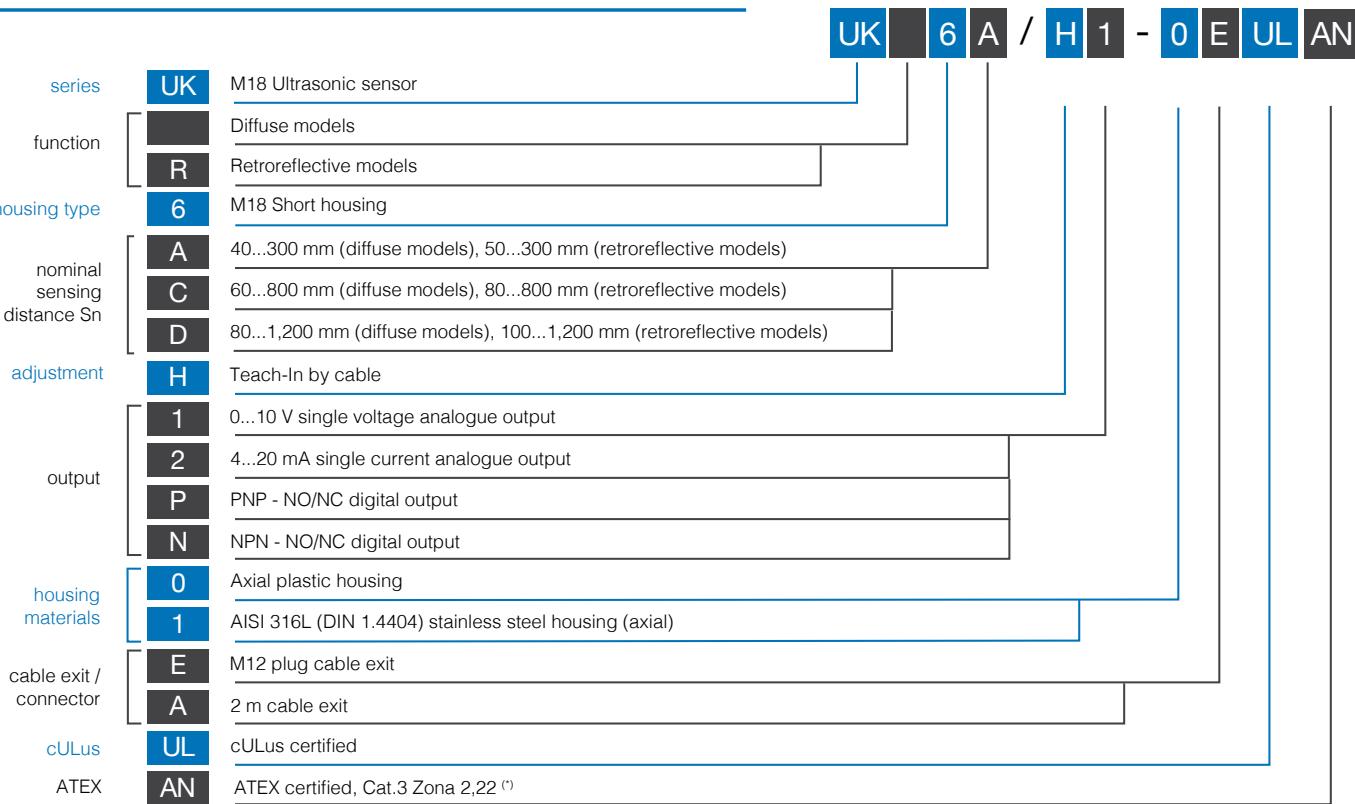

(*) Only for the PNP plug version.



M18 short body
with Teach-in button



available models

diffuse models

M18 short body
with Teach-In button

housing	material	output	distance (mm)	PNP - NO/NC	NPN - NO/NC	analogue output 0...10 V	analogue output 4...20 mA
M18	plasticc	M12	40...300	UK6A/HP-0EUL	UK6A/HN-0EUL	UK6A/H1-0EUL	UK6A/H2-0EUL
			60...800	UK6C/HP-0EUL	UK6C/HN-0EUL	UK6C/H1-0EUL	UK6C/H2-0EUL
			80...1,200	UK6D/HP-0EUL	UK6D/HN-0EUL	UK6D/H1-0EUL	UK6D/H2-0EUL
		cable	40...300	UK6A/HP-0AUL	UK6A/HN-0AUL	UK6A/H1-0AUL	UK6A/H2-0AUL
			60...800	UK6C/HP-0AUL	UK6C/HN-0AUL	UK6C/H1-0AUL	UK6C/H2-0AUL
			80...1,200	UK6D/HP-0AUL	UK6D/HN-0AUL	UK6D/H1-0AUL	UK6D/H2-0AUL

housing	material	output	distance (mm)	PNP - NO/NC	NPN - NO/NC	analogue output 0...10 V	analogue output 4...20 mA
M18	plasticc	M12	40...300	UK6A/HP-1EUL	UK6A/HN-1EUL	UK6A/H1-1EUL	UK6A/H2-1EUL
			60...800	UK6C/HP-1EUL	UK6C/HN-1EUL	UK6C/H1-1EUL	UK6C/H2-1EUL
			80...1,200	UK6D/HP-1EUL	UK6D/HN-1EUL	UK6D/H1-1EUL	UK6D/H2-1EUL
		cable	40...300	UK6A/HP-1AUL	UK6A/HN-1AUL	UK6A/H1-1AUL	UK6A/H2-1AUL
			60...800	UK6C/HP-1AUL	UK6C/HN-1AUL	UK6C/H1-1AUL	UK6C/H2-1AUL
			80...1,200	UK6D/HP-1AUL	UK6D/HN-1AUL	UK6D/H1-1AUL	UK6D/H2-1AUL

available models

retroreflective models

housing	material	distance (mm)	plastic housing		metal housing	
			PNP - NO/NC	NPN - NO/NC	PNP - NO/NC	NPN - NO/NC
M18	M12	50...300	UKR6A/HP-0EUL	UKR6A/HN-0EUL	UKR6A/HP-1EUL	UKR6A/HN-1EUL
		80...800	UKR6C/HP-0EUL	UKR6C/HN-0EUL	UKR6C/HP-1EUL	UKR6C/HN-1EUL
		100...1,200	UKR6D/HP-0EUL	UKR6D/HN-0EUL	UKR6D/HP-1EUL	UKR6D/HN-1EUL
	cable	50...300	UKR6A/HP-0AUL	UKR6A/HN-0AUL	UKR6A/HP-1AUL	UKR6A/HN-1AUL
		80...800	UKR6C/HP-0AUL	UKR6C/HN-0AUL	UKR6C/HP-1AUL	UKR6C/HN-1AUL
		100...1,200	UKR6ADHP-0AUL	UKR6D/HN-0AUL	UKR6D/HP-1AUL	UKR6D/HN-1AUL

technical specification

diffuse models



M18 short body
with Teach-In button

	UK6A/H*-**	UK6C/H*-**	UK6D/H*-**
	300 mm	800 mm	1.200 mm
nominal sensing distance			
minimum sensing distance	40 mm	60 mm	80 mm
beam angle	$7^\circ \pm 2^\circ$		$8^\circ \pm 2^\circ$
switching frequency	8 Hz	5 Hz	5 Hz
operating voltage		10...30 Vdc	
max ripple content		5 %	
output type	PNP or NPN - NO/NC selectable analogue output: 0...10 V - 4...20 mA		
output current	100 mA		
output voltage drop	$\leq 2,2$ V (@ I = 100 mA)		
no-load supply current	≤ 35 mA @ Val = 30 V		
leakage current	≤ 10 μ A @ 30 V		
power on delay	≤ 100 ms		
temperature range	$-20^\circ\text{C}...+70^\circ\text{C}$		
temperature drift of Sr	≤ 5 %		
short-circuit protection	● (autoreset)		
induction protection	●		
voltage reversal protection	●		
weight	plastic version: 65 g connector / 75 g cable metallic housing: 80 g connector / 140 g cable		
LEDs	yellow: output green: alignment		
protection degree	IP67		
EMC	IEC60947-5-2		
housing material	plastic housing: PTB metal housing: AISI316L		
active head material	epoxy - glass resin		
connection	M12 plug cable exit 2 m cable exit		

(1) metallic target 100 x 100

(2) metallic target 200 x 200



technical specification

M18 short body
with Teach-In button

	UK6RA/H-**	UKR6C/H*-**	UKR6D/H*-**
nominal sensing distance	300 mm	800 mm	1,200 mm
detection distance Sr	270 mm	720 mm	1,080 mm
minimum distance from background	50 mm	80 mm	100 mm
beam angle	7° ± 2°		8° ± 2°
switching frequency	8 Hz	5 Hz	3 Hz
operating voltage		10...30 Vdc	
max ripple content		5 %	
output type		PNP or NPN - NO/NC selectable	
output current		100 mA	
output voltage drop		≤ 2,2 V (@ I = 100mA)	
no-load supply current		≤ 35 mA @ Val = 30 V	
leakage current		≤ 10 µA @ 30 V	
power on delay		≤ 100 ms	
temperature range		-20°C...+70°C	
temperature drift of Sr		≤ 5 %	
short-circuit protection		● (autoreset)	
induction protection		●	
voltage reversal protection		●	
weight	65 g plastic version / 80 g metallic version		
LEDs		yellow: output green: alignment	
protection degree		IP67	
EMC		IEC60947-5-2	
housing material		plastic housing: PTB metal housing: AISI316L	
active head material		epoxy - glass resin	
connection		M12 plug cable exit 2 m cable exit	

electrical diagrams of connections




M18 short body
with Teach-In button

models with single analogue output	PNP NO/NC models	NPN NO/NC models
		


connector

M12 UK6*/**-**


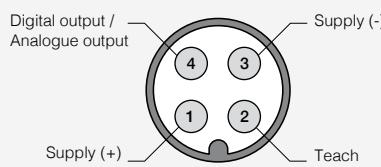


available outputs

models with single digital output

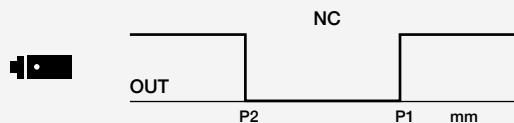

models with single analogue output

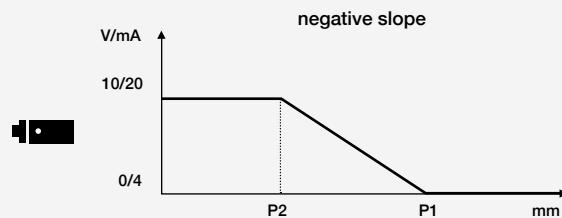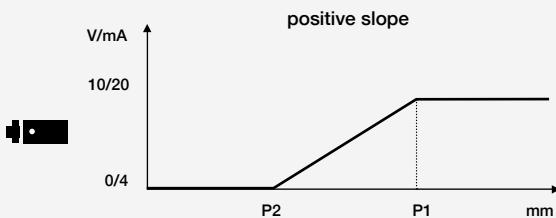




response diagrams

direct diffuse models

M18 short body
with Teach-In button

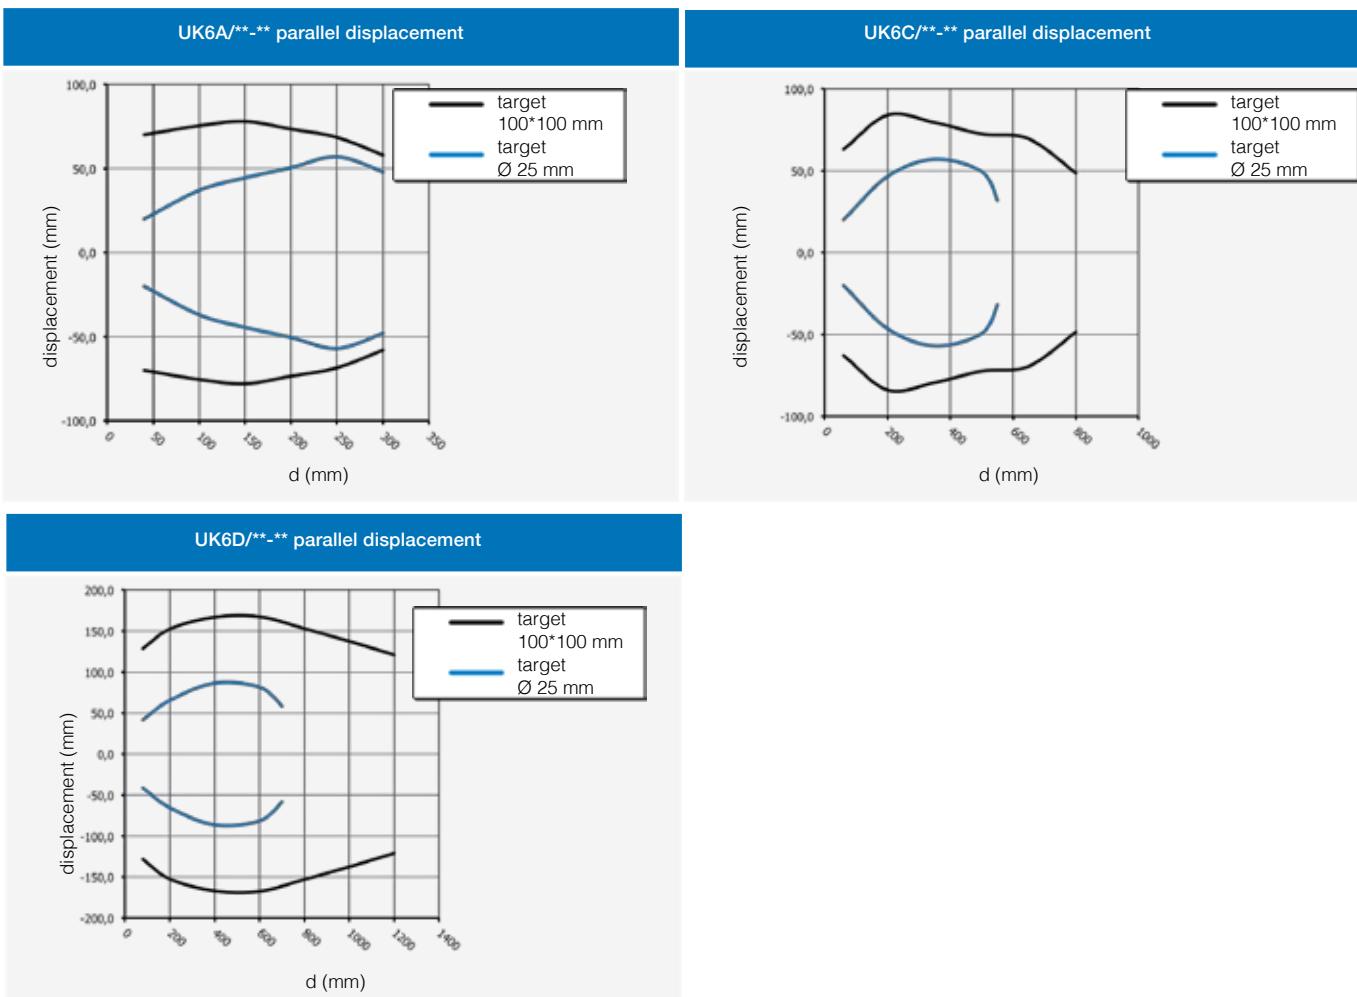


response diagrams

retro-reflective models




M18 short body
with Teach-In button


UK6RA/**-** parallel displacement

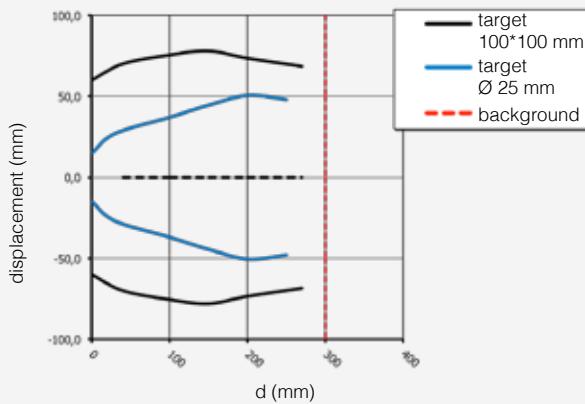

UK6RC/**-** parallel displacement

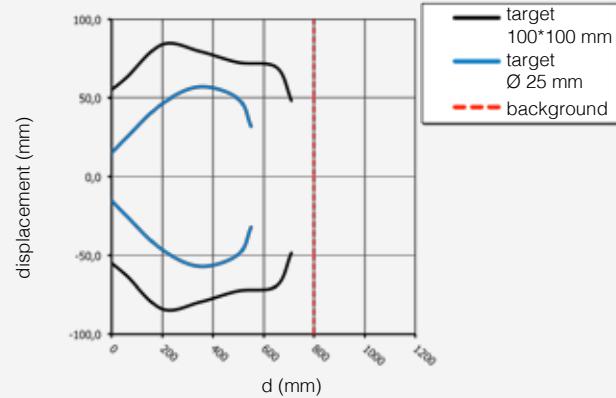

UK6RD/**-** parallel displacement

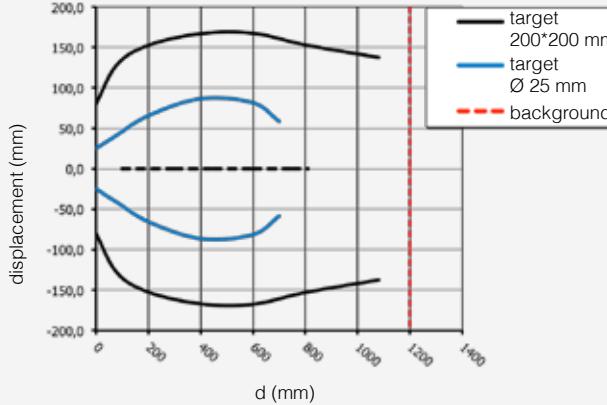

adjustment

Reflector detection (Sd)

Install the sensor in the correct position. Install the background (any solid, flat, fixed surface) perpendicularly to the sensor's axes. Connect the Teach-in wire to +24V (PNP models) or to 0V (NPN models) for 2 sec. Yellow LED blinks for 5 times, after that, the sensor acquires the background position (Sd distance).

NO/NC selection

Connect the Teach-in wire to +24V (PNP models) or to 0V (NPN models) for a time > 8 sec. Yellow LED blinks quickly until the teach-in wire is released, then 5 blinks confirm the change of working state. The sensor change its working mode from NO to NC and vice versa.


Operating distance (Sr)

The effective operating distance (Sr) is equivalent to background distance (Sd) decreases of 10%. This hysteresis allows the correct detection of the target even if the background is vibrating during the machine normal operations.



dimensions (mm)


M18 short body
with Teach-In button

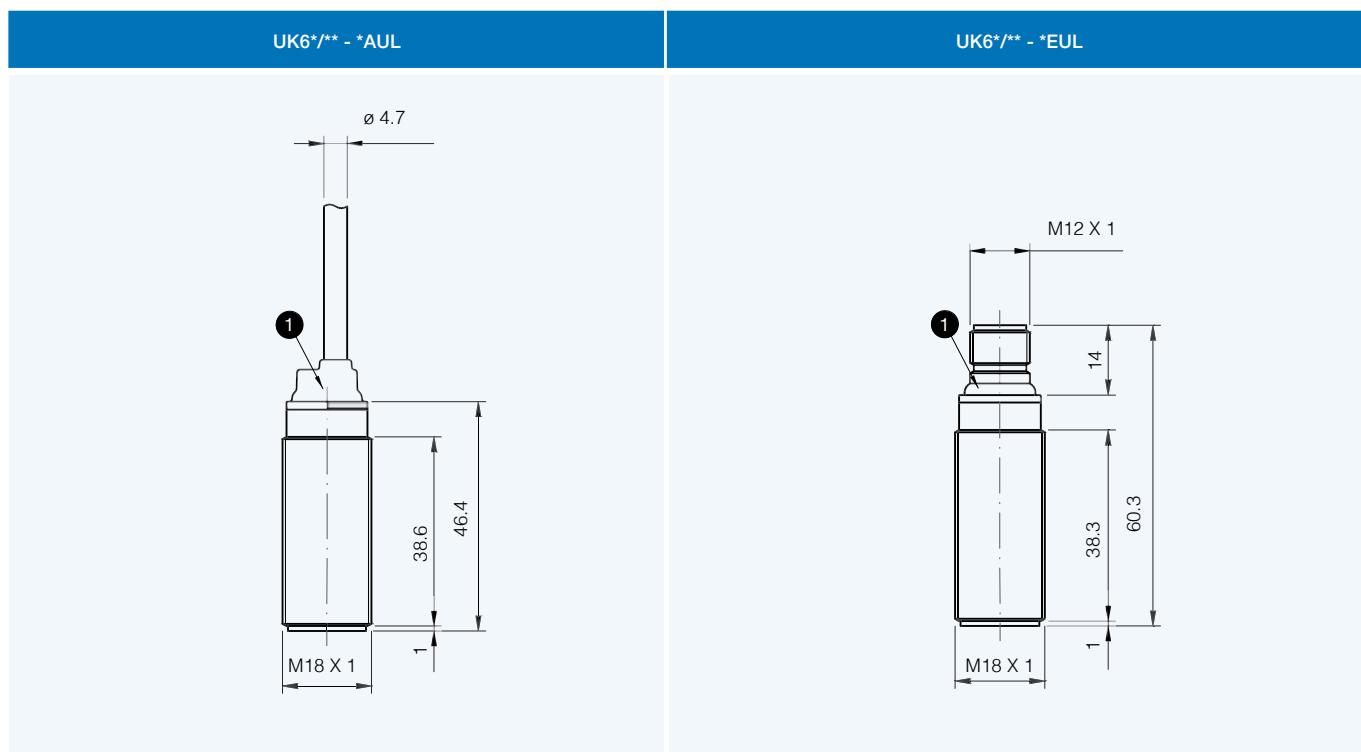

1 LED


dimensions (mm)

accessories included in all plastic models

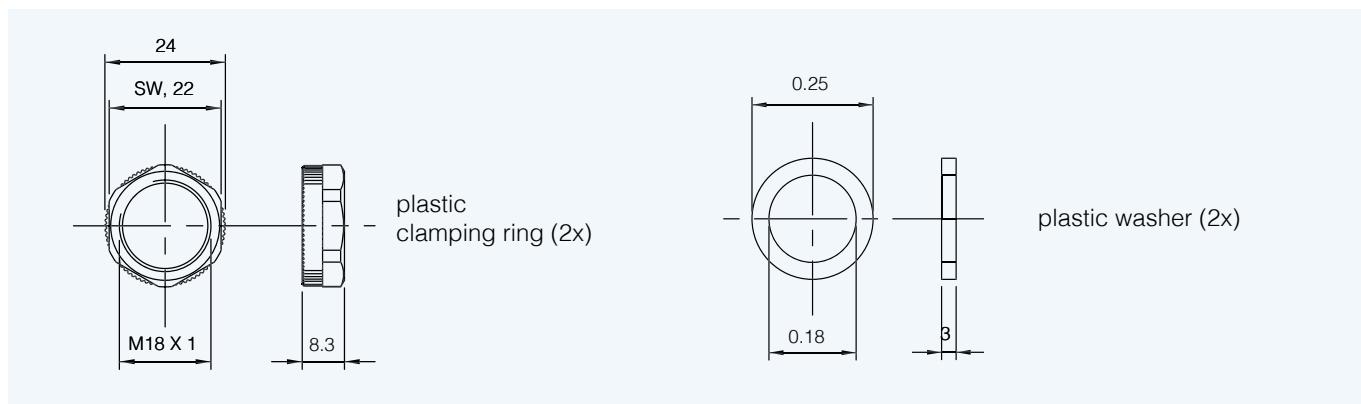

dimensions (mm)

accessories included in all metallic models

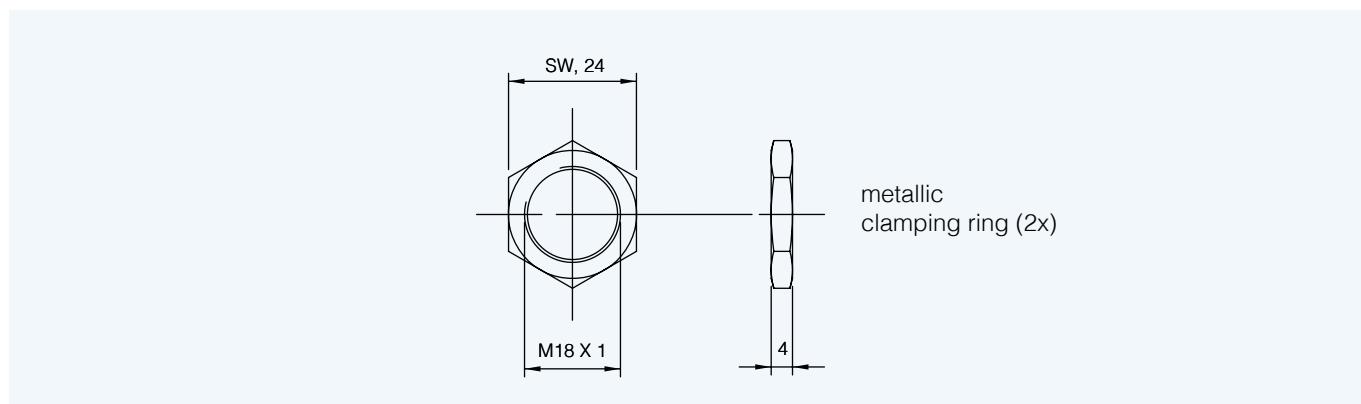



UT and UTR series

M30 cylindrical direct diffuse & retro-reflective
Ultrasonic Sensor with Teach-In button



features

- M30 ultrasonic sensor with standard housing and with large front with high performances and high sensing distances
- Adjustable hysteresis function: models with double digital programmable output specific for level detection
- Models with voltage or current output: programmable slope to optimize resolution
- Adjustable working area (window mode or object mode) by Teach-in button on all models for a quick and easy installation
- Two multifunction LEDs: orange LED for adjustment procedure and output type and green LED for target alignment
- Plastic and AISI 316L stainless steel housing, plug M12 or cable exit 4 pin



web contents



- Application notes
- Photos
- Catalogue / Manuals



code description^(*)

UT | 1 | B / E | 1 - 0 | E | UL

series	UT	M30 Ultrasonic Sensor
function	D	Direct diffuse models
	R	Retroreflective models
housing type	1	Standard housing
	2	Large front transducer, Ø 38.8 mm
nominal sensing distance Sn	B	250 - 3,500 mm direct diffuse/350 - 3,500 metallic housing
	F	350 - 6,000 mm direct diffuse
adjustment	E	Sensitivity adjustment and NO/NC selection by Teach-in button
	1	0...10 V single voltage analogue output
	2	4...20 mA single current analogue output
	P	PNP - NO/NC digital output
	N	NPN- NO/NC digital output
output	W	PNP two digital outputs with standard window and adjustable hysteresis functions ^(**)
	M	NPN two digital outputs with standard window and adjustable hysteresis functions ^(**)
	6	PNP - NO/NC digital output + 4 ... 20 mA current analogue output
	4	NPN - NO/NC digital output + 4 ... 20 mA current analogue output
	7	PNP - NO/NC digital output + 0 ... 10 V voltage analogue output
	9	NPN - NO/NC digital output + 0 ... 10 V voltage analogue output
housing materials	0	Axial plastic housing
	1	Axial AISI 316L (DIN 1.4404) stainless steel housing
cable exit / connector	E	M12 plug cable exit
	A	2 m cable exit
cULus	UL	With cULus certification

^(*) Models with synchronization available ^(**) Sensitivity adjustment and status selection available by external Teach-In.



available models

cULus certified

housing	distance (mm)	output	analogue output 0...10 V	analogue output 4...20 mA	1 x PNP - NO/NC	1 x NPN - NO/NC
plastic	3,500 mm	M12	UT1B/E1-0EUL	UT1B/E2-0EUL	UT1B/EP-0EUL	UT1B/EN-0EUL
		cable	UT1B/E1-0AUL	UK1B/E2-0AUL	UT1B/EP-0AUL	UT1B/EN-0AUL

M30 with Teach-In button

available models

cULus certified - Double digital output

housing	distance (mm)	output	2 X PNP (adjustable hysteresis + standard window MD)	2 X NPN (adjustable hysteresis + standard window MD)
plastic	3,500 mm	M12	UT1B/EW-0EUL	UT1B/EM-0EUL
		cable	UT1B/EW-0AUL	UK1B/EM-0AUL
AISI316L		M12	UT1B/EW-1EUL	UT1B/EM-1EUL
		cable	UT1B/EW-1AUL	UT1B/EM-1AUL
plastic	6,000 mm	M12	UT2F/EW-0EUL	UT2F/EM-0EUL
		cable	UT2F/EW-0AUL	UT2F/EH-0AUL

available models

cULus certified - Double mixed output (digital + analogue)

housing	distance (mm)	output	1 x PNP - NO/NC + 4...20 mA	1 x NPN - NO/NC + 4...20 mA	1 x PNP - NO/NC + 0...10 V	1 x NPN - NO/NC + 0...10 V
plastico	3,500 mm	M12	UT1B/E6-0EUL	UT1B/E4-0EUL	UT1B/E7-0EUL	UT1B/E9-0EUL
		cable	UT1B/E6-0AUL	UT1B/E4-0AUL	UT1B/E7-0AUL	UT1B/E9-0AUL
acciaio inox AISI 316L		M12	UT1B/E6-1EUL	UT1B/E4-1EUL	UT1B/E7-1EUL	UT1B/E9-1EUL
		cable	UT1B/E6-1AUL	UT1B/E4-1AUL	UT1B/E7-1AUL	UT1B/E9-1AUL
plastico	6,000 mm	M12	UT2F/E6-0EUL	UT2F/E4-0EUL	UT2F/E7-0EUL	UT2F/E9-0EUL
		cable	UT2F/E6-0AUL	UT2F/E4-0AUL	UT2F/E7-0AUL	UT2F/E9-0AUL

technical specification (cULus certified)



M30 with Teach-In button

	UT1B/E*-**UL	UT2F/E*-0*UL
maximum sensing distance	3,500 mm ⁽¹⁾	6,000 mm ⁽²⁾
minimum sensing distance	250 mm / 350 mm metallic housing	350 mm
sensing range (Sd)	250...3.500 mm (plastic) / 350...3.500 mm (metallic)	350...6.000 mm
beam angle	± 7°	± 9°
switching frequency (digital output)	2 Hz / 1 Hz metallic housing	1 Hz
response time (digital output)	250 ms	500 ms
response time (analogue output)	600 ms	600 ms
hysteresis	1 % off full scale value	
repeatability	1 % off full scale value	0.5 % off full scale value
resolution	4 mm	6 mm
linearity error	1 % off full scale value	
temperature range	- 20°C...+ 70°C	
temperature compensation	•	
operating voltage	12 - 30 Vcc; 15 - 30 Vcc: for model with analog voltage output (0 - 10 V)	
temperature drift	± 8 % (digital output); ± 5 % (analogue output)	
ripple	5 %	
leakage current	≤ 10 µA @ 30 Vcc	
output voltage drop	2.2 V max. (IL = 100 mA)	
no-load supply current	≤ 50 mA	
output current (digital output)	100 mA	
minimum load resistance (analog voltage output)	3 kΩ	
set point adjustment	Teach-In button	
power on delay	≤ 500 ms (digital output)	
power on delay	≤ 900 ms (analogue output)	
power supply protections	polarity reversal, transient	
digital output electrical protection	short circuit (auto reset), overvoltage pulses	
analog output electrical protections	overvoltage pulses	
EMC	conforming to EMC Directive, according to EN 60947-5-2	
protection degree	IP67 (EN60529); NEMA 4X ⁽³⁾	IP67 (EN 60529) ⁽³⁾
housing material	PBT/AISI 316L	PBT
active head material	epoxy-glass resin	
tightening torque	1.5 Nm (plastic housing) / 100 Nm (metallic housing)	1.5 Nm
weight	plastic version: 140 g connector / 200 g cable metallic version: 215 g connector / 220 g cable	170 g connector / 300 g cable
storage temperature	- 35°C...+ 70° without freeze	

⁽¹⁾ Metallic target 200 x 200 mm ⁽²⁾ Metallic target 400 x 400 ⁽³⁾ Protection guarantee only with plug cable well mounted



available models

retroreflective models M30


housing	function	portata (mm)	output	PNP - NO/NC	NPN - NO/NC
plastic	retroreflective	250...3,500	M12	UTR1B/EP-0EUL	UTR1B/EN-0EUL
		350...6,000		UTR2F/EP-0EUL	UTR2F/EN-0EUL
		250...3,500	cable	UTR1B/EP-0AUL	UTR1B/EN-0AUL
		350...6,000		UTR2F/EP-0AUL	UTR2F/EN-0AUL

technical specification (cULus certified)


	UTR1B/E*-0*	UTR2F/E*-0*
nominal sensing distance Sn	3,500 mm ⁽¹⁾	6,000 mm ⁽²⁾
reflector minimum sensing distance	250 mm	350 mm
beam angle	± 7°	± 8°
switching frequency	1 Hz	1 Hz
operating voltage	15 - 30 Vdc	
max. ripple content	5 %	
output type	PNP o NPN NO/NC selectable	
output current	100 mA	
output voltage drop	≤ 2.2 V (@ I = 100mA)	
no-load supply current	≤ 50 mA @ Val=24V	
leakage current	≤ 10 µA @ 30V	
power on delay	≤ 500 ms	
temperature range	-20°C...+70°C	
temperature drift of Sr	≤ 5 %	
short-circuit protection	● (autoreset)	
induction protection	●	
voltage reversal protection	●	
LEDs	yellow: output green: alignment	
protection degree	IP67	
EMC	conforming to EMC Directive according to EN 60947-5-2	
housing material	PBT	
active head material	epoxy glass resin	
connection	M12 plug cable exit, 2 m cable exit	

⁽¹⁾ Metallic target 200 x 200 mm ⁽²⁾ Metallic target 400 x 400 mm ⁽³⁾ Protection granted only by plug mounted in a correct way

electrical diagrams of connections

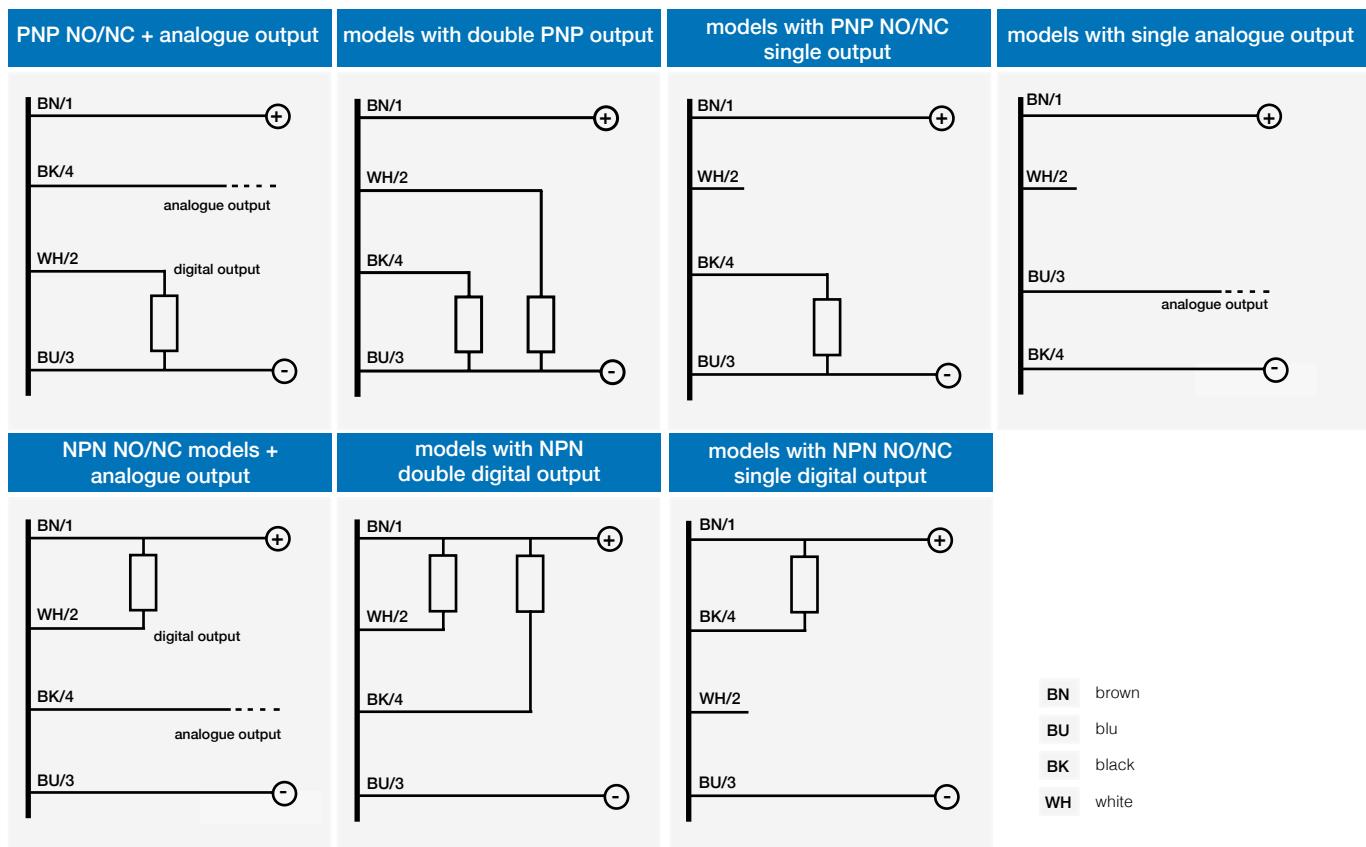


plugs

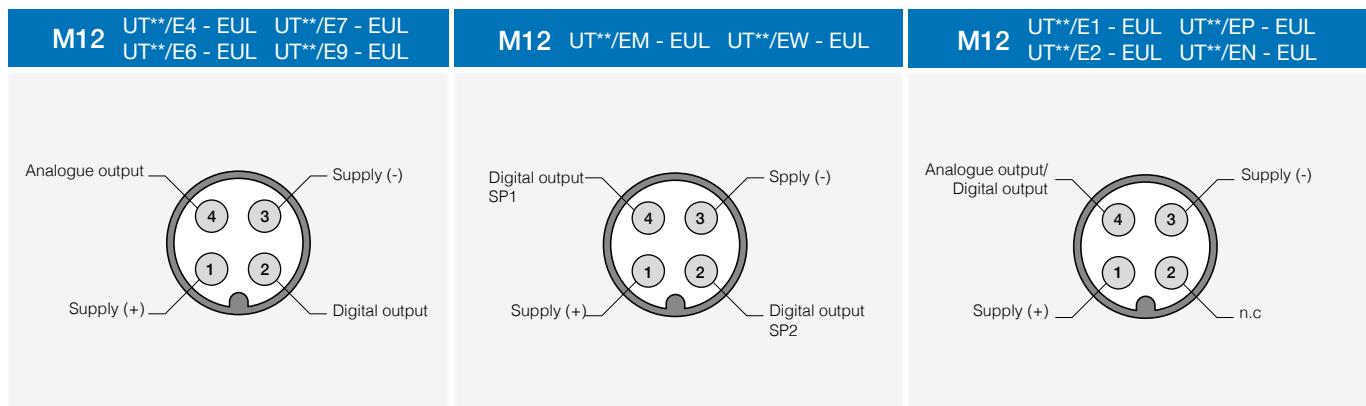

response diagrams

direct diffuse models

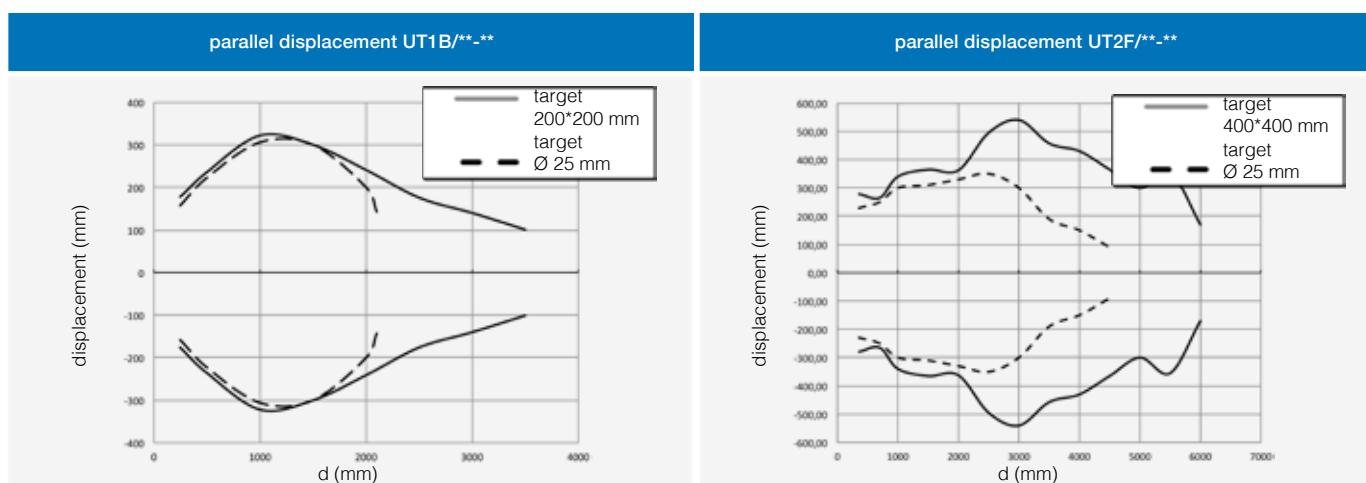





response diagrams

retroreflective models

M30 with Teach-In button


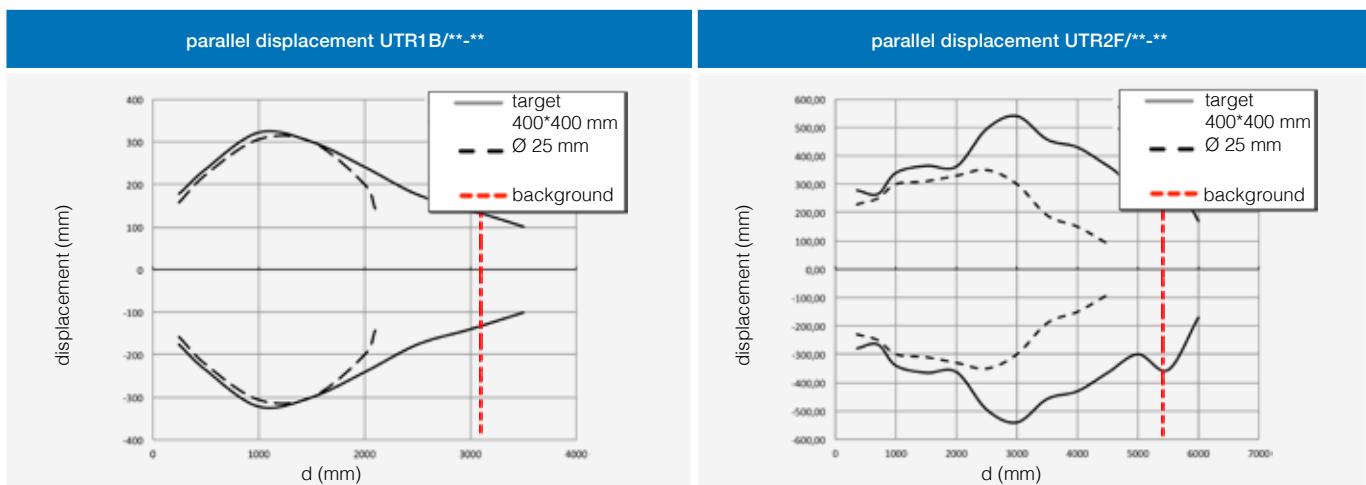


available outputs

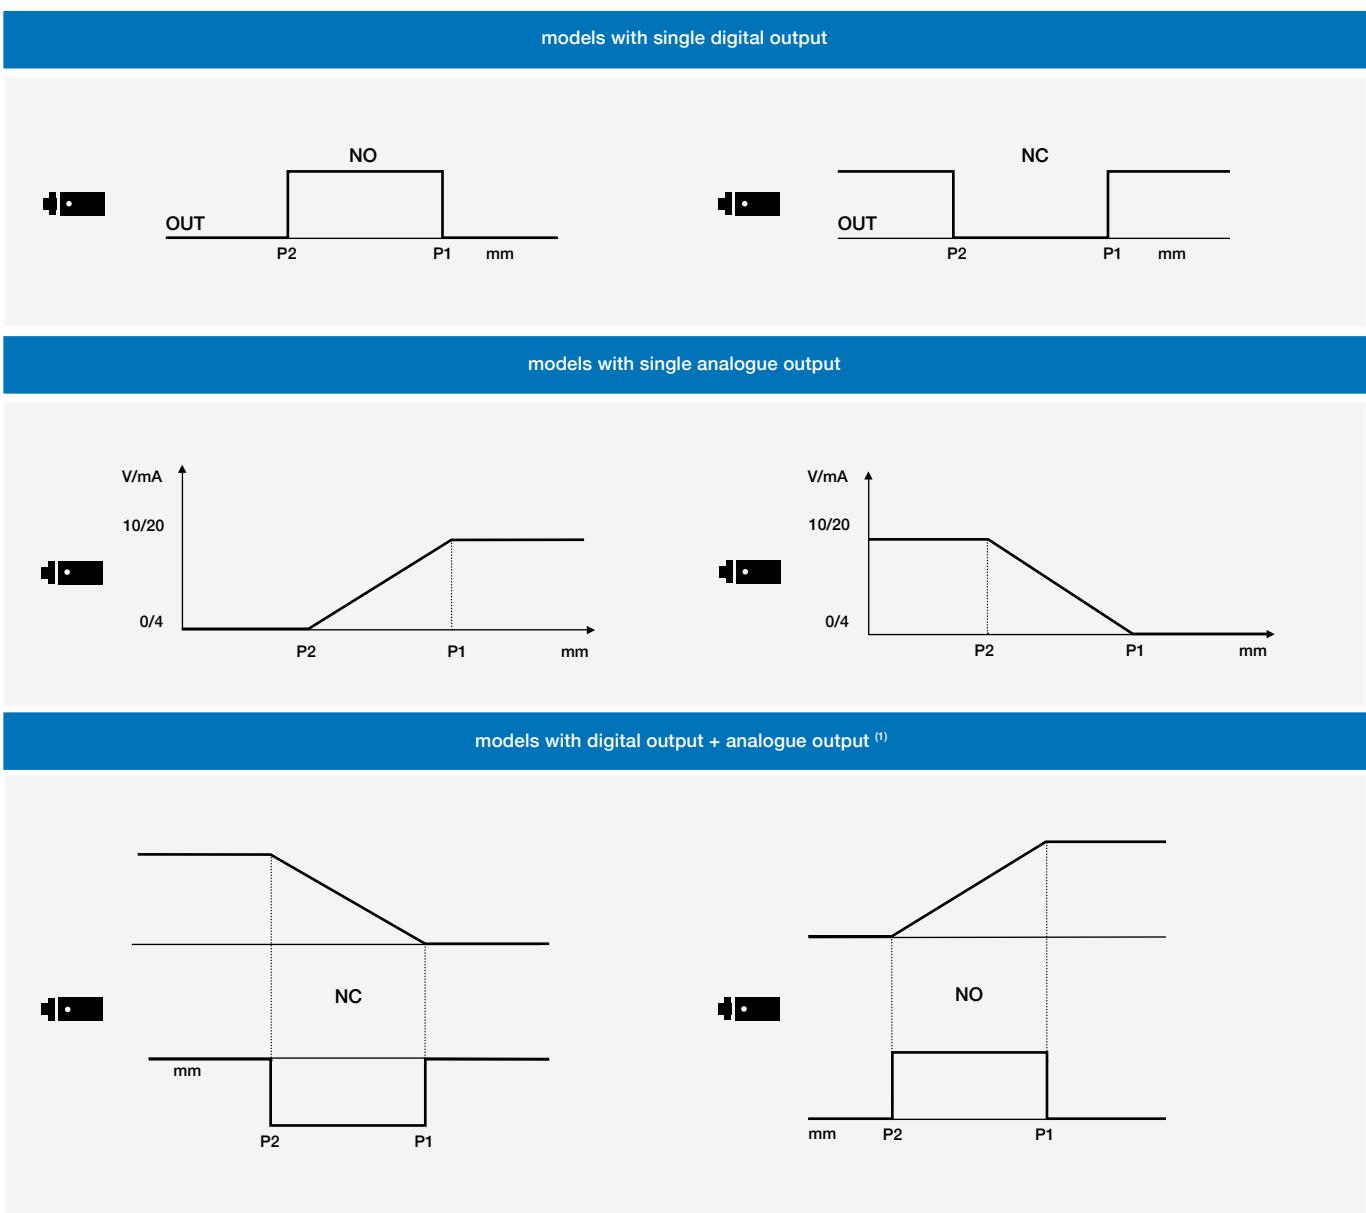


models with double output, hysteresis + standard window⁽²⁾

NO

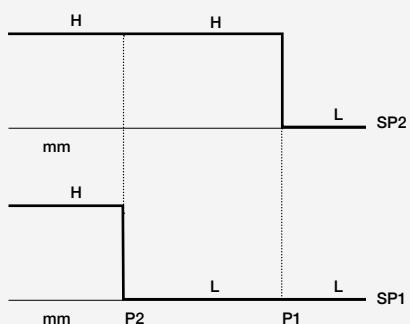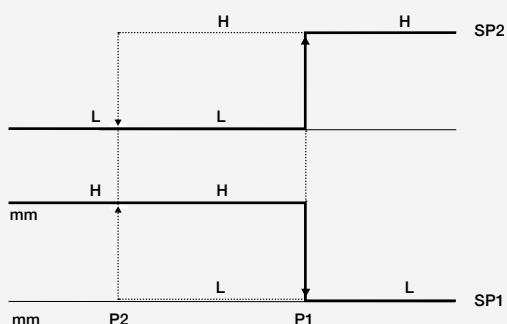⁽¹⁾ Suitable, also, as single model output.⁽²⁾ In the double digital output model with the standard window and adjustable hysteresis functions if the target is removed from sensor detection range, the output type switches. These models are not foreseen with NO/NC function.**P1** maximum selected working distance and first point to select**P2** minimum selected working distance and second point to select

dimensions (mm)

plastic models

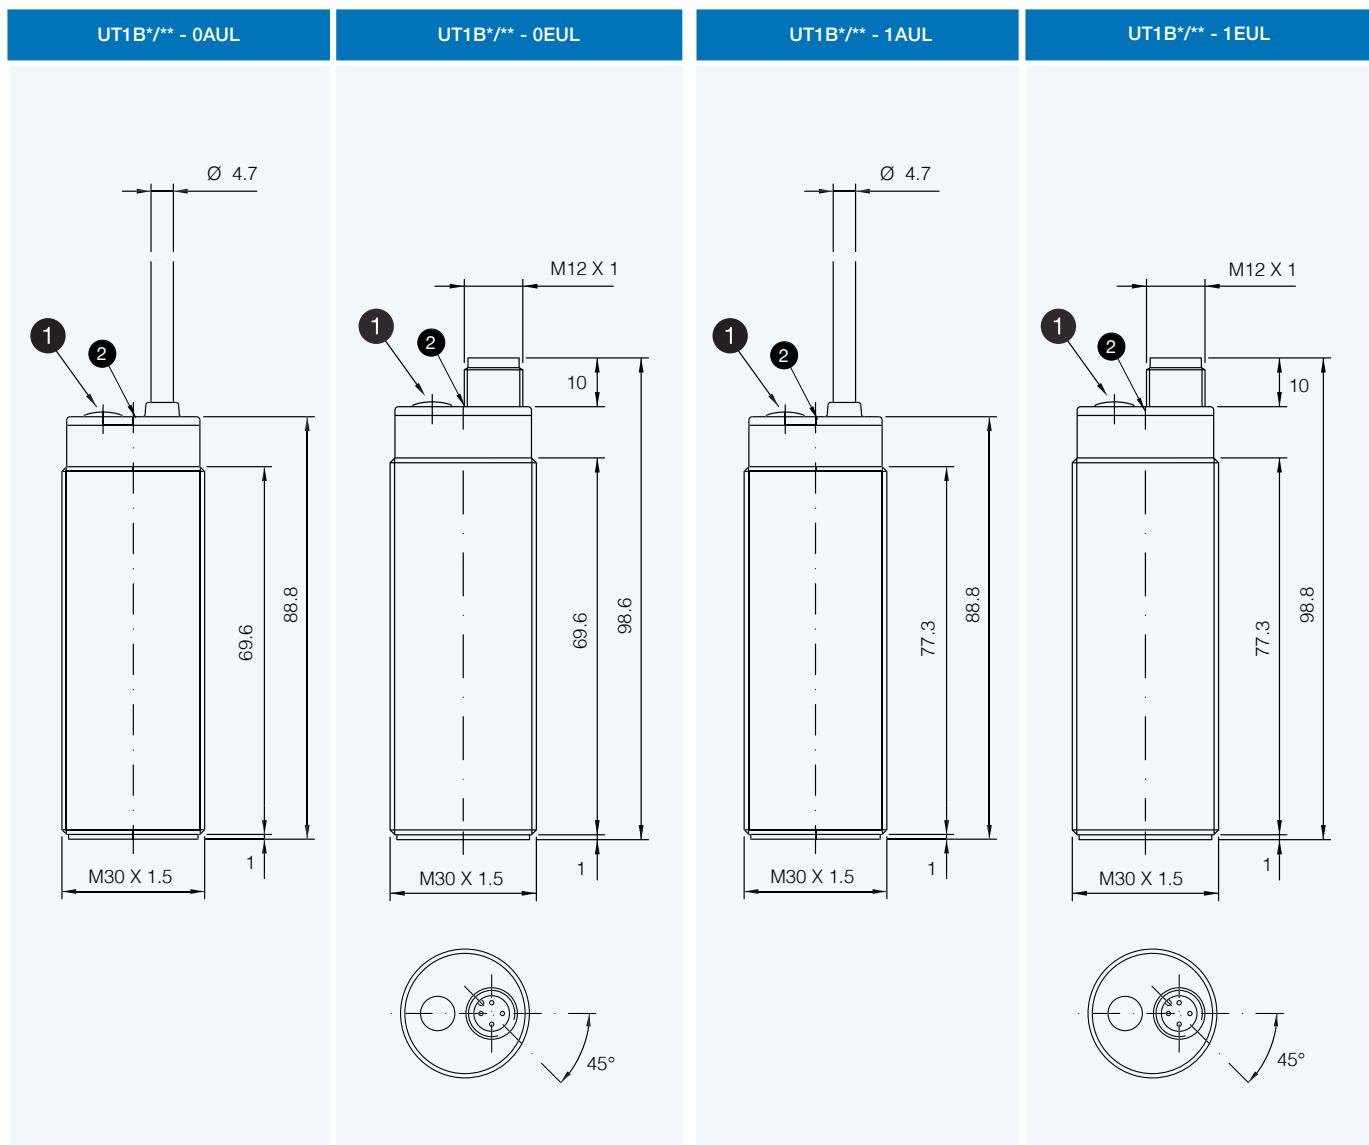**1** Teach-In button**2** LED

dimensions (mm)


metallic models



dimensions (mm)


accessories included in all metallic models

M30 with Teach-In button

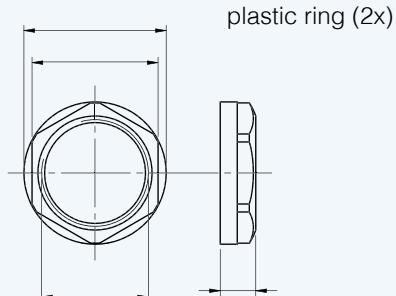

dimensions (mm)


accessories included in all metallic models

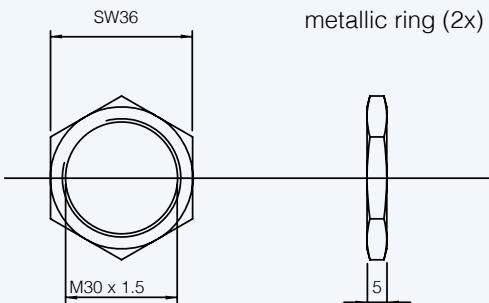


dimensions (mm)

plastic models

UT2F** - 0AUL

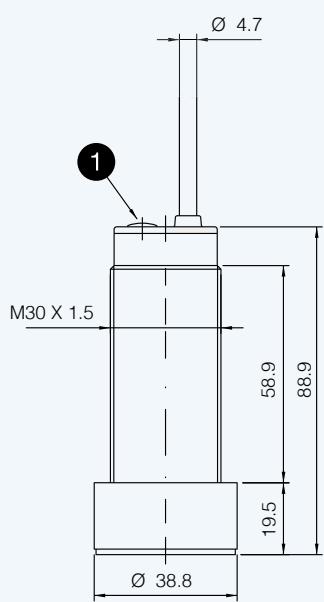

UT2F** - 0EUL

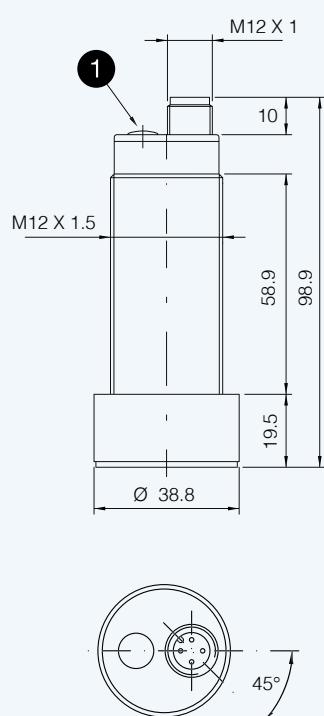


1 Teach-In button

dimensions (mm)

accessories included in all metallic models

UT - UTR

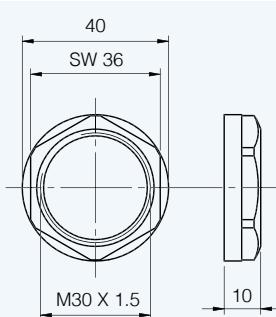

plastic ring (2x)



UH series

Cubic through beam ultrasonic sensors



features

- Total protection against any type of electric damages
- Plastic housing
- IP67 protection degree
- Approvals: CE


web contents



- Application notes
- Photos
- Catalogue / Manuals



code description

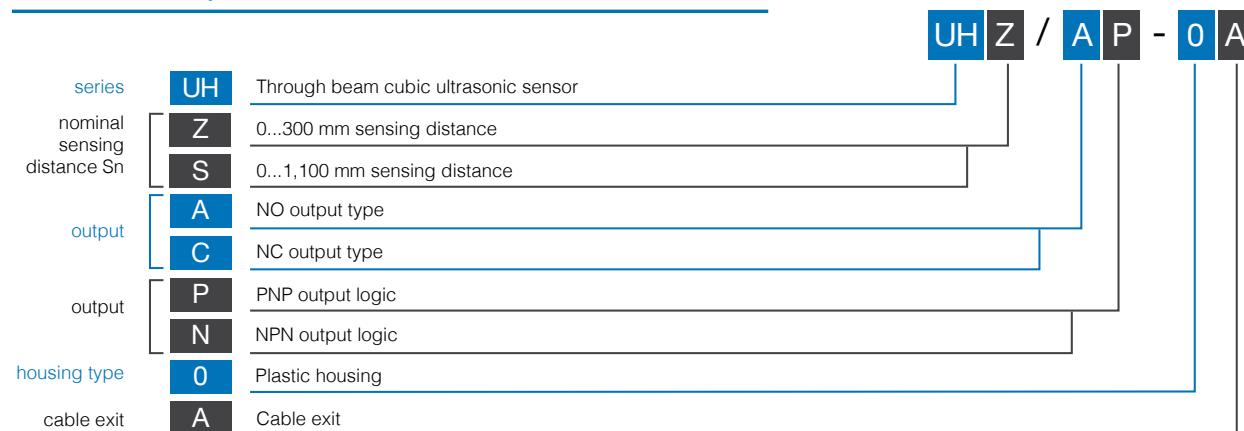

available models

dimension	distance (mm)	output	NO - PNP	NO - NPN	NC - PNP	NC - NPN
20 x 30 x 15 mm	0...300 mm	cavo	UHZ/AP-0A	UHZ/AN-0A	UHZ/CP-0A	UHZ/CN-0A
24 x 50 x 15 mm	0...1,100 mm		UHS/AP-0A	UHS/AN-0A	UHS/CP-0A	UHS/CN-0A



Cubic through beam

UH



technical specifications

Cubic through beam


	UHZ/** - 0A	UHS/** - 0A
maximum sensing distance	300 mm	1,100 mm
minimum sensing distance	0 mm	
sensing range (Sd)	250..3,500 mm	350..6,000 mm
beam angle	± 8° ± 9°	
switching frequency (digital output)	500 Hz	
response time (digital output)	1 ms 500 ms	
emission frequency	300 kHz	180 kHz
repeatability	-	
linearity error	-	
temperature range	- 15°C...+ 60°C	
temperature compensation	- 25°C...+ 75°C	
operating voltage	●	
temperature drift	-	
ripple	<10 %	
leakage current	< 10 µA	
output voltage drop	-	
no-load supply current	< 40 mA	
output current	PNP o NPN - NO o NC	
minimum load resistance	< 2.5 V	
maximus load resistance	500 mA	
set point adjustment	-	
power on delay	<200 ms	
power supply protections	polarity reversal, overvoltage pulses	
digital output protections	short circuit autoreset	
LEDs	yellow (output activated)	
EMC	conforming to EMC Directive, according to EN 60947-5-2	
protection degree	IP67 (EN60529)	
housing material	PBT	
active head material	ceramics	
tightening torque	-	
weight	150 g	100 g
storage temperature	-	

Specifications are guaranteed only using emitter and receiver with the same serial number. Attention: do not expose sensor head to hot water ($> 50^\circ\text{C}$) or water steam.

electrical diagrams of connections




Cubic through beam

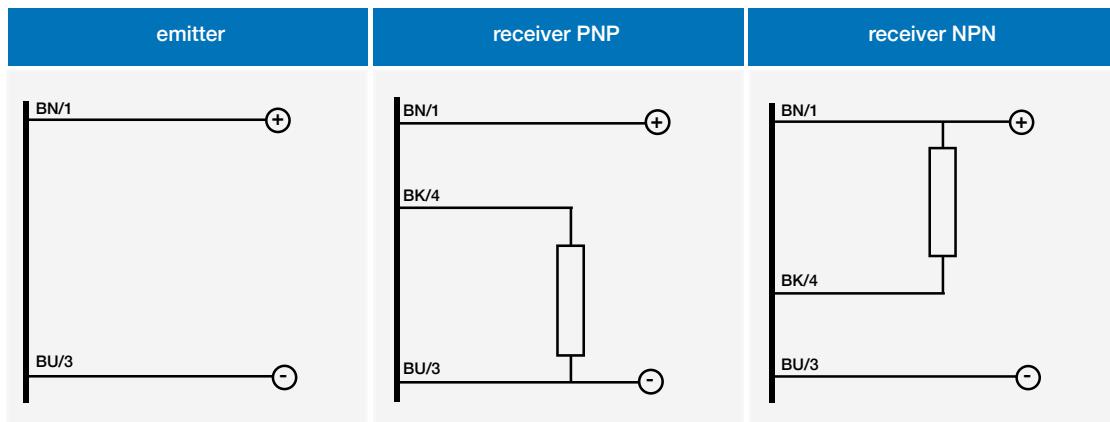

- BN brown
- BU blu
- BK black
- WH white

dimensions (mm)

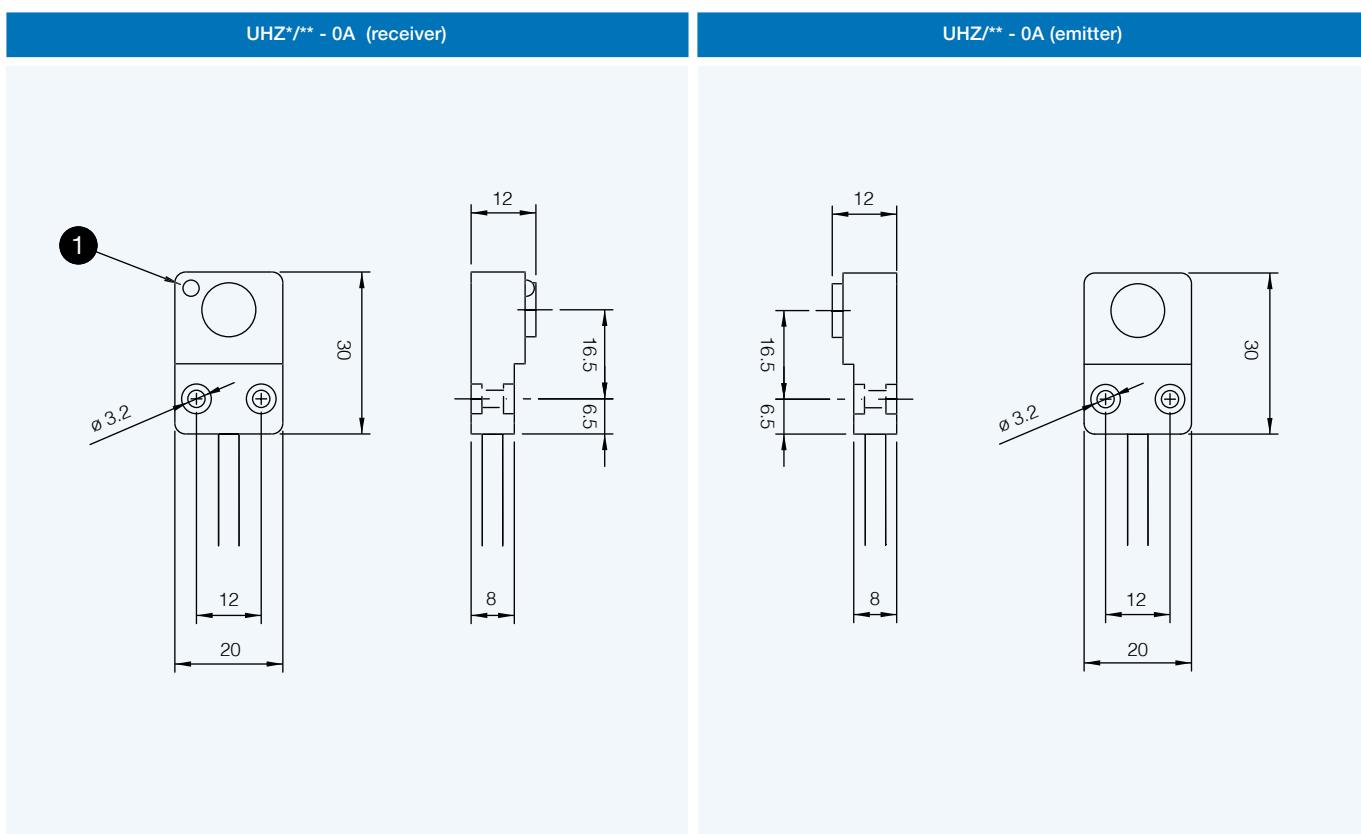

1 LED


UH




dimensions (mm)

Cubic through beam

UHS*/* - 0A (receiver)

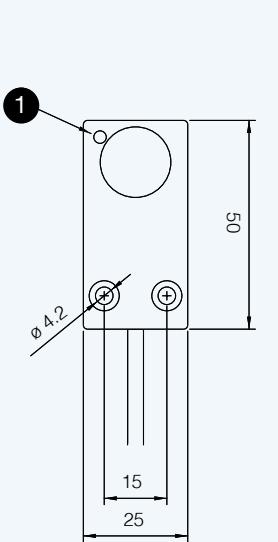

UHS*/* - 0A (emitter)

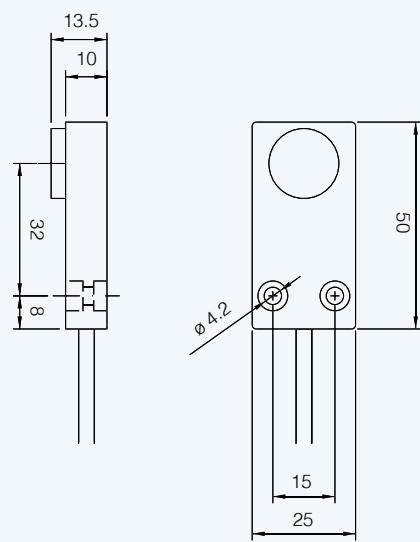

① LED



QU series

Cubic through beam high range
Ultrasonic Sensors



Cubic through beam
high range

features

- Working area adjusting by external Teach-In to avoid tampering of the sensing distance
- Current or voltage analogue output
- Complete protection against electrical damages
- Plastic housing
- IP65 protection degree
- Approvals: CE




web contents



- Application notes
- Photos
- Catalogue / Manuals



code description

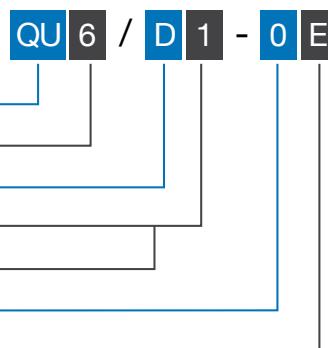

available models

dimension (mm)	distance (mm)	output	analogue output 0...10 V	digital output 4...20 mA
80 x 67 x 50	600...6,000	connettore M12	QU6/D1- 0E	QU6/D2- 0E



technical specifications

Cubic through beam
high range

	QU6/D1- 0E	QU6/D2- 0E
maximum sensing distance		6,000 mm
minimum sensing distance		600 mm
beam angle		$\pm 8^\circ \pm 9^\circ$
switching frequency (digital output)		-
response time (digital output)		700 ms
hysteresis		-
repeatability		0.2 % ± 2 mm
linearity error		< 0.5 %
temperature range		-20°C...+ 70°C
temperature compensation	•	
operating voltage	15 - 30 Vcc	
temperature drift		< 1 %
ripple		< 10%
leakage current		< 10 μ A
no-load supply current		< 30 mA
output current (digital output)	0...10 V	4...20 mA
output current (analogue output)	< 5 mA	-
maximus load resistance		-
set point adjustment		Teach-In button
power on delay		<1 s
power supply protections		polarity reversal, transient
digital output protections		short circuit (auto reset)
analogue output protections		-
EMC	conforming to EMC Directive, according to EN 60947-5-2	
protection degree	IP67 (EN60529) ⁽¹⁾ IP67 (EN 60529) ⁽³⁾	
housing material	PBTP PBT	
active head material	ceramics	
weight	450 g	

⁽¹⁾ Protection guaranteed only with plug cable well mounted

Valid for room temperature 25°C


Attention: do not expose sensor head to hot water (>50°C) or water steam

electrical diagrams of connections

plug


QU6/D*- 0E**	M12 QU6/D*- 0E**
<pre> Pin1 + 24 Vdc Pin4 Analogue Pin5 Teach-In Pin3 0 V </pre>	<pre> analogue output Supply (-) (4) (3) (5) (1) (2) Supply (+) N.C. </pre>

available output

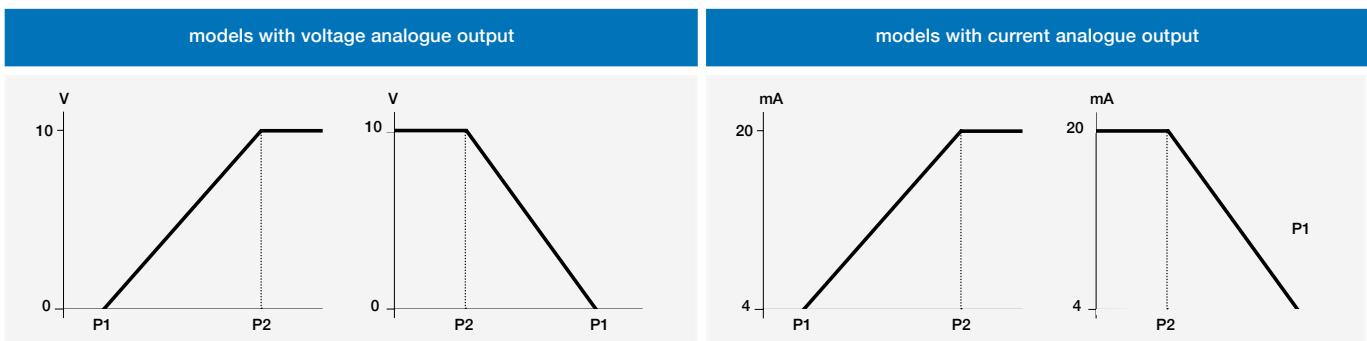


P1 e P2 are the switching points set through the Teach-In cable (pin5). The analogue output is on pin4, linear between P1 e P2. By suitably setting P1 and P2, it is possible to select a positive or negative ramp and the NC or NO status of the output.

curve di risposta

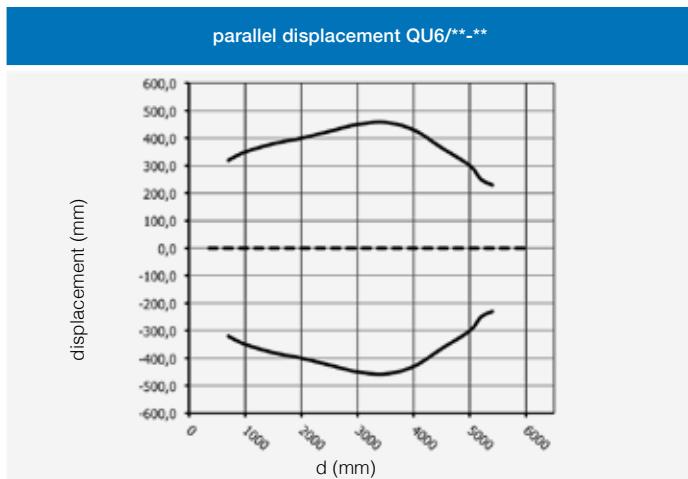

dimensions (mm)

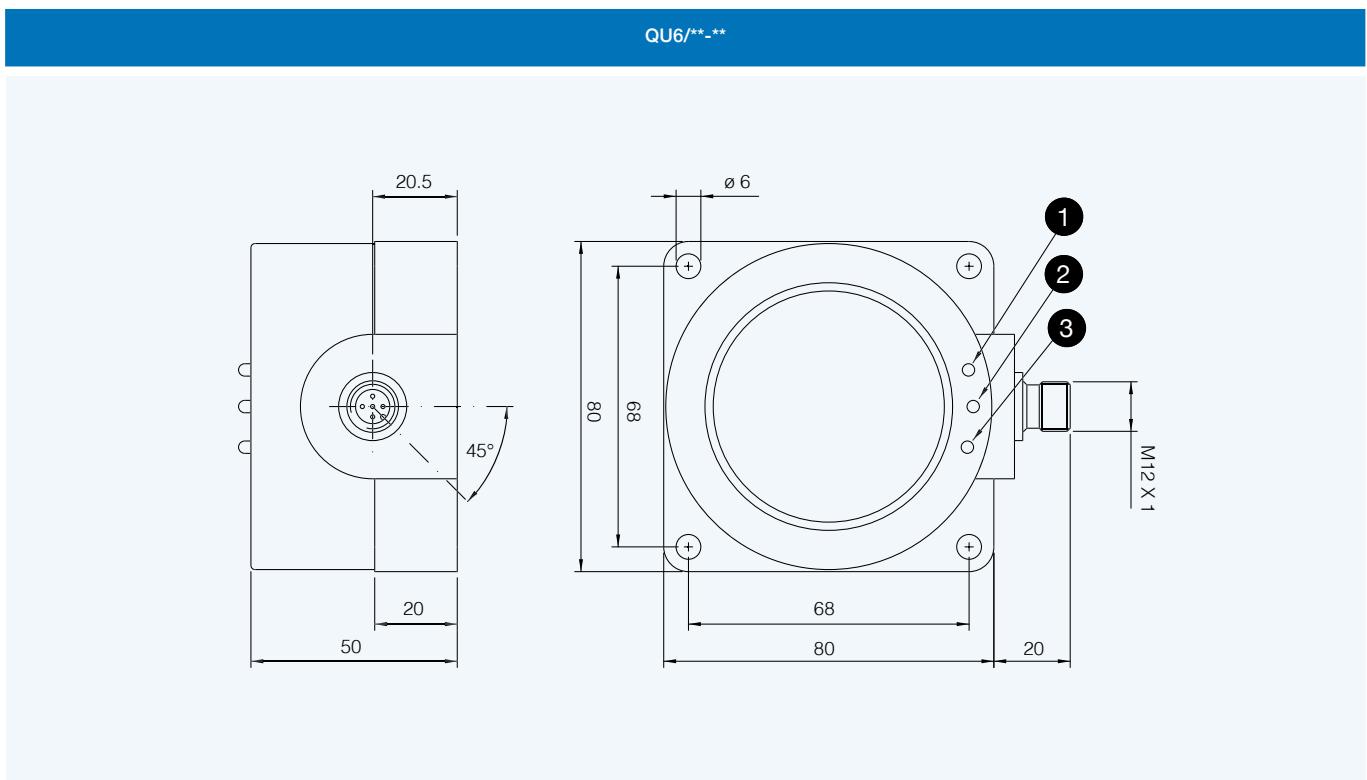

1 P2 2 P1 3 ECHO





notes



FC8 series

Ultrasonic fork sensors for
label detection



features

- Ultrasonic fork sensor for transparent labels, any opaque material with connector M8 4-pole
- Teach-in models with dynamic and remote teach
- Ultrasonic technology
- Small size easy to locate; aluminum case
- NPN and PNP, Lo/Do total configurable
- Width slit detection 3 mm; depth slit detection 69 mm
- Maximum switching frequency 1.500 Hz




web contents



- Application notes
- Photos
- Catalogue / Manuals



code description

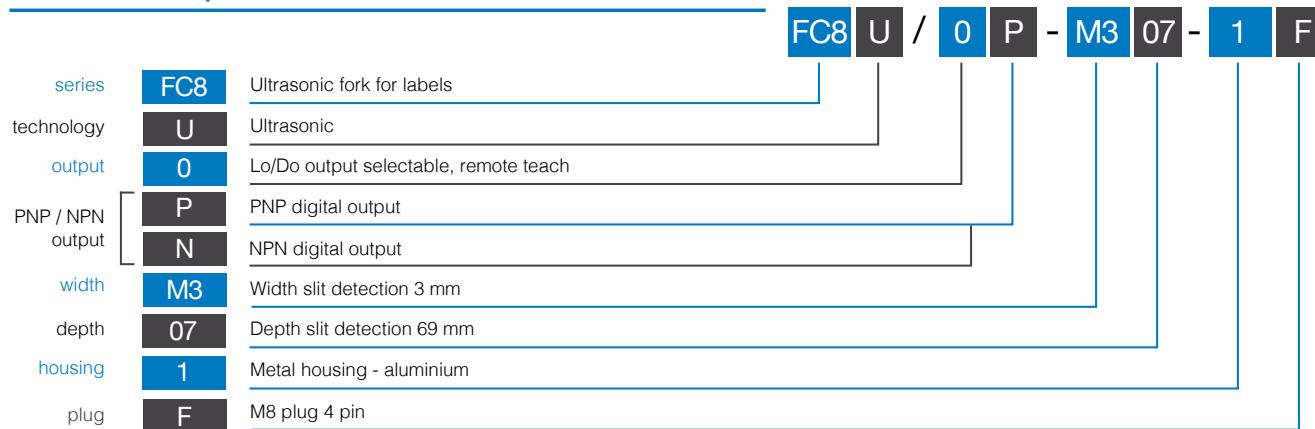

available models

supply	installation	PNP	NPN	NPN / PNP
12...24 Vdc	M8 4 pins	FC8U/0P-M307-1F	FC8U/0N-M307-1F	FC8U/0B-M307-1F



Ultrasonic
fork sensors

FC8




technical specification

Ultrasonic
fork sensors

FC8U/0*-M307-1F	
	
nominal sensing distance	3 mm
minimum length of label	2 mm
minimum sensing distance between 2 labels	2 mm
slot depth detection	69 mm
slot lenght detection	-
emission	ultrasonic
maximum flow rate	180 m/min
detection accuracy	+/- 0,20 um at 120 m/min
rated operational voltage	12 ... 24 Vdc (with protection against reverse polarity)
max ripple content	10%
no-load supply current	45 mA
load current	100 mA
output voltage drop	≤ 2 V @ IL = 100 mA
switching frequency	1.500 kHz
power on delay	300 us
power supply protections	short-circuit output protected interference suppression
operation temperature range	+ 5 ...+55 °C
storage temperature	- 20 ...+70 °C
protection degree	IP65, IEC (EN60529)
housing material	painted aluminium
connection	M8 4 pins
weight approx.	160 g

electrical diagrams of the connections

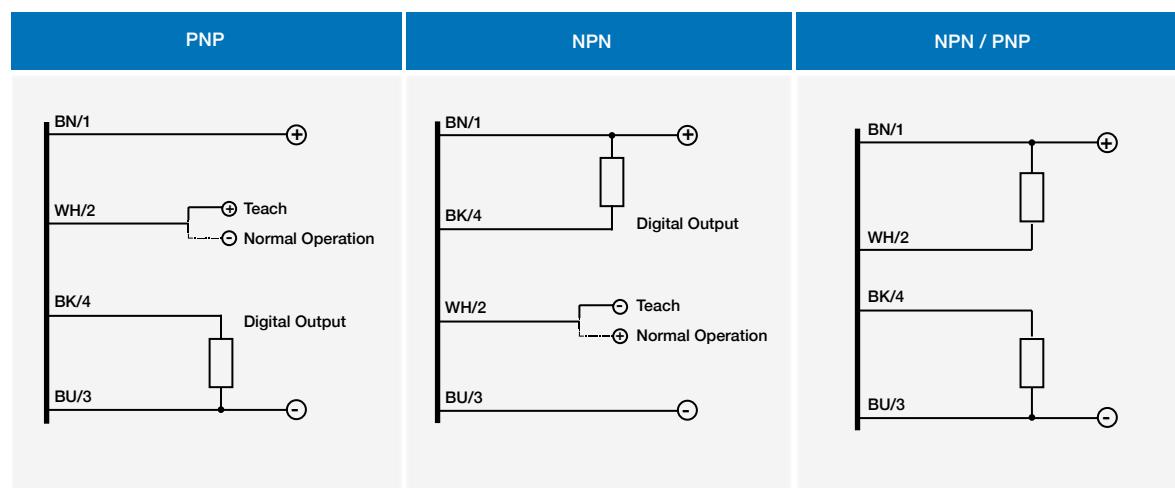


plug




Ultrasonic
fork
sensors

M8 FC8/**-**-**

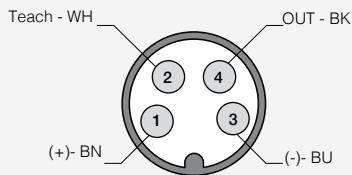


M8 FC8/0B-**-**

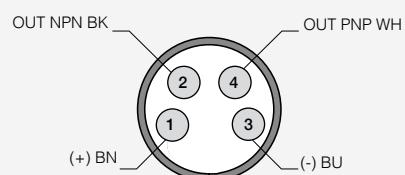

dimensions (mm)

FC8U/**-**-**

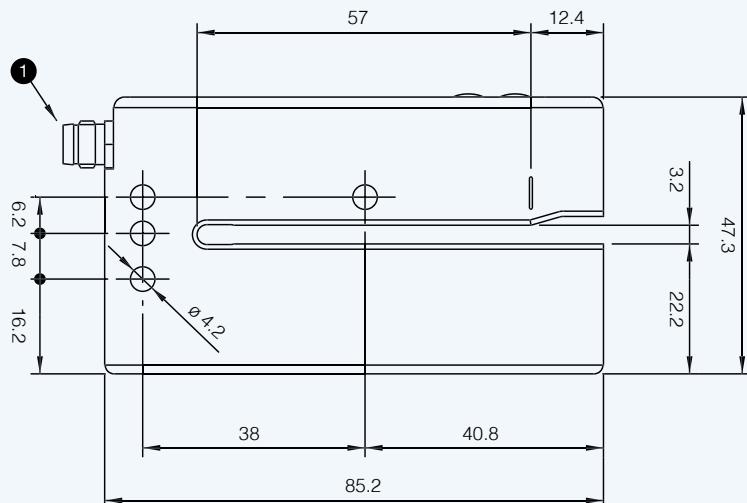

- 1 button -
- 2 button +
- 3 yellow LED, "ON" when the outputs are set to 1 (run)
- 4 red LED: keyboard lock and regulation